

Project: AD5000E (React.Elect.)
Committed: -
Customer: -
Drawer: 01
Date: 12/11/2018

Exercise tension:	3x400Vac + PE
Auxiliary tension	24Vdc
Frequency	50Hz
Nominal current	85,2 A
Total power	57,3 KW
Protection level	IP54




TECNOFRIGO TUSCANY srl
*Via J.F.Kennedy, 25/27/29 - 56020 Z.Ind.Fontanelle
Capanne - Montopoli Val D'Arno (Pisa)*
Tel. +39 0571 467351 Fax +39 0571 469217
e-mail: info@tftdryair.com - www.tftdryair.com

1	Modifica bobina di sgancio resistenze	12/04/2019			
Rev.	Changes	Date	Prepared	Verified	Approved

OPTION TABLE			
	OPTION	DESCRIPTION	PAGES
	N. 1	PROCESS FAN SPEED VARIATOR	04
	N. 2	RIGENERATION FAN SPEED VARIATOR	05
	N. 3	MODULATING CONTROL RIGENERATION HEATERS (PWM)	07
	N. 4	ALARM FILTER PROCESS AIR	12
	N. 5	ALARM FILTER RIGENERATION AIR	12
	N. 6	PRE-TREATMENT TEMPERATURE PROBE	13
	N. 7	POST-TREATMENT TEMPERATURE PROBE (PASSIVE)	13
	N. 8	RELATIVE HUMIDITY / TEMPERATURE POST-TREATMENT/AMBIENT (ACTIVE)	13
	N. 9	SIGNAL PROPORTIONAL OR AIR SPEED PROBE FOR PROCESS FAN CONTROL	13
	N. 10	3 WAY VALVE FOR PRE-COOLING WATER	14
	N. 11	3 WAY VALVE FOR POST-COOLING WATER	14



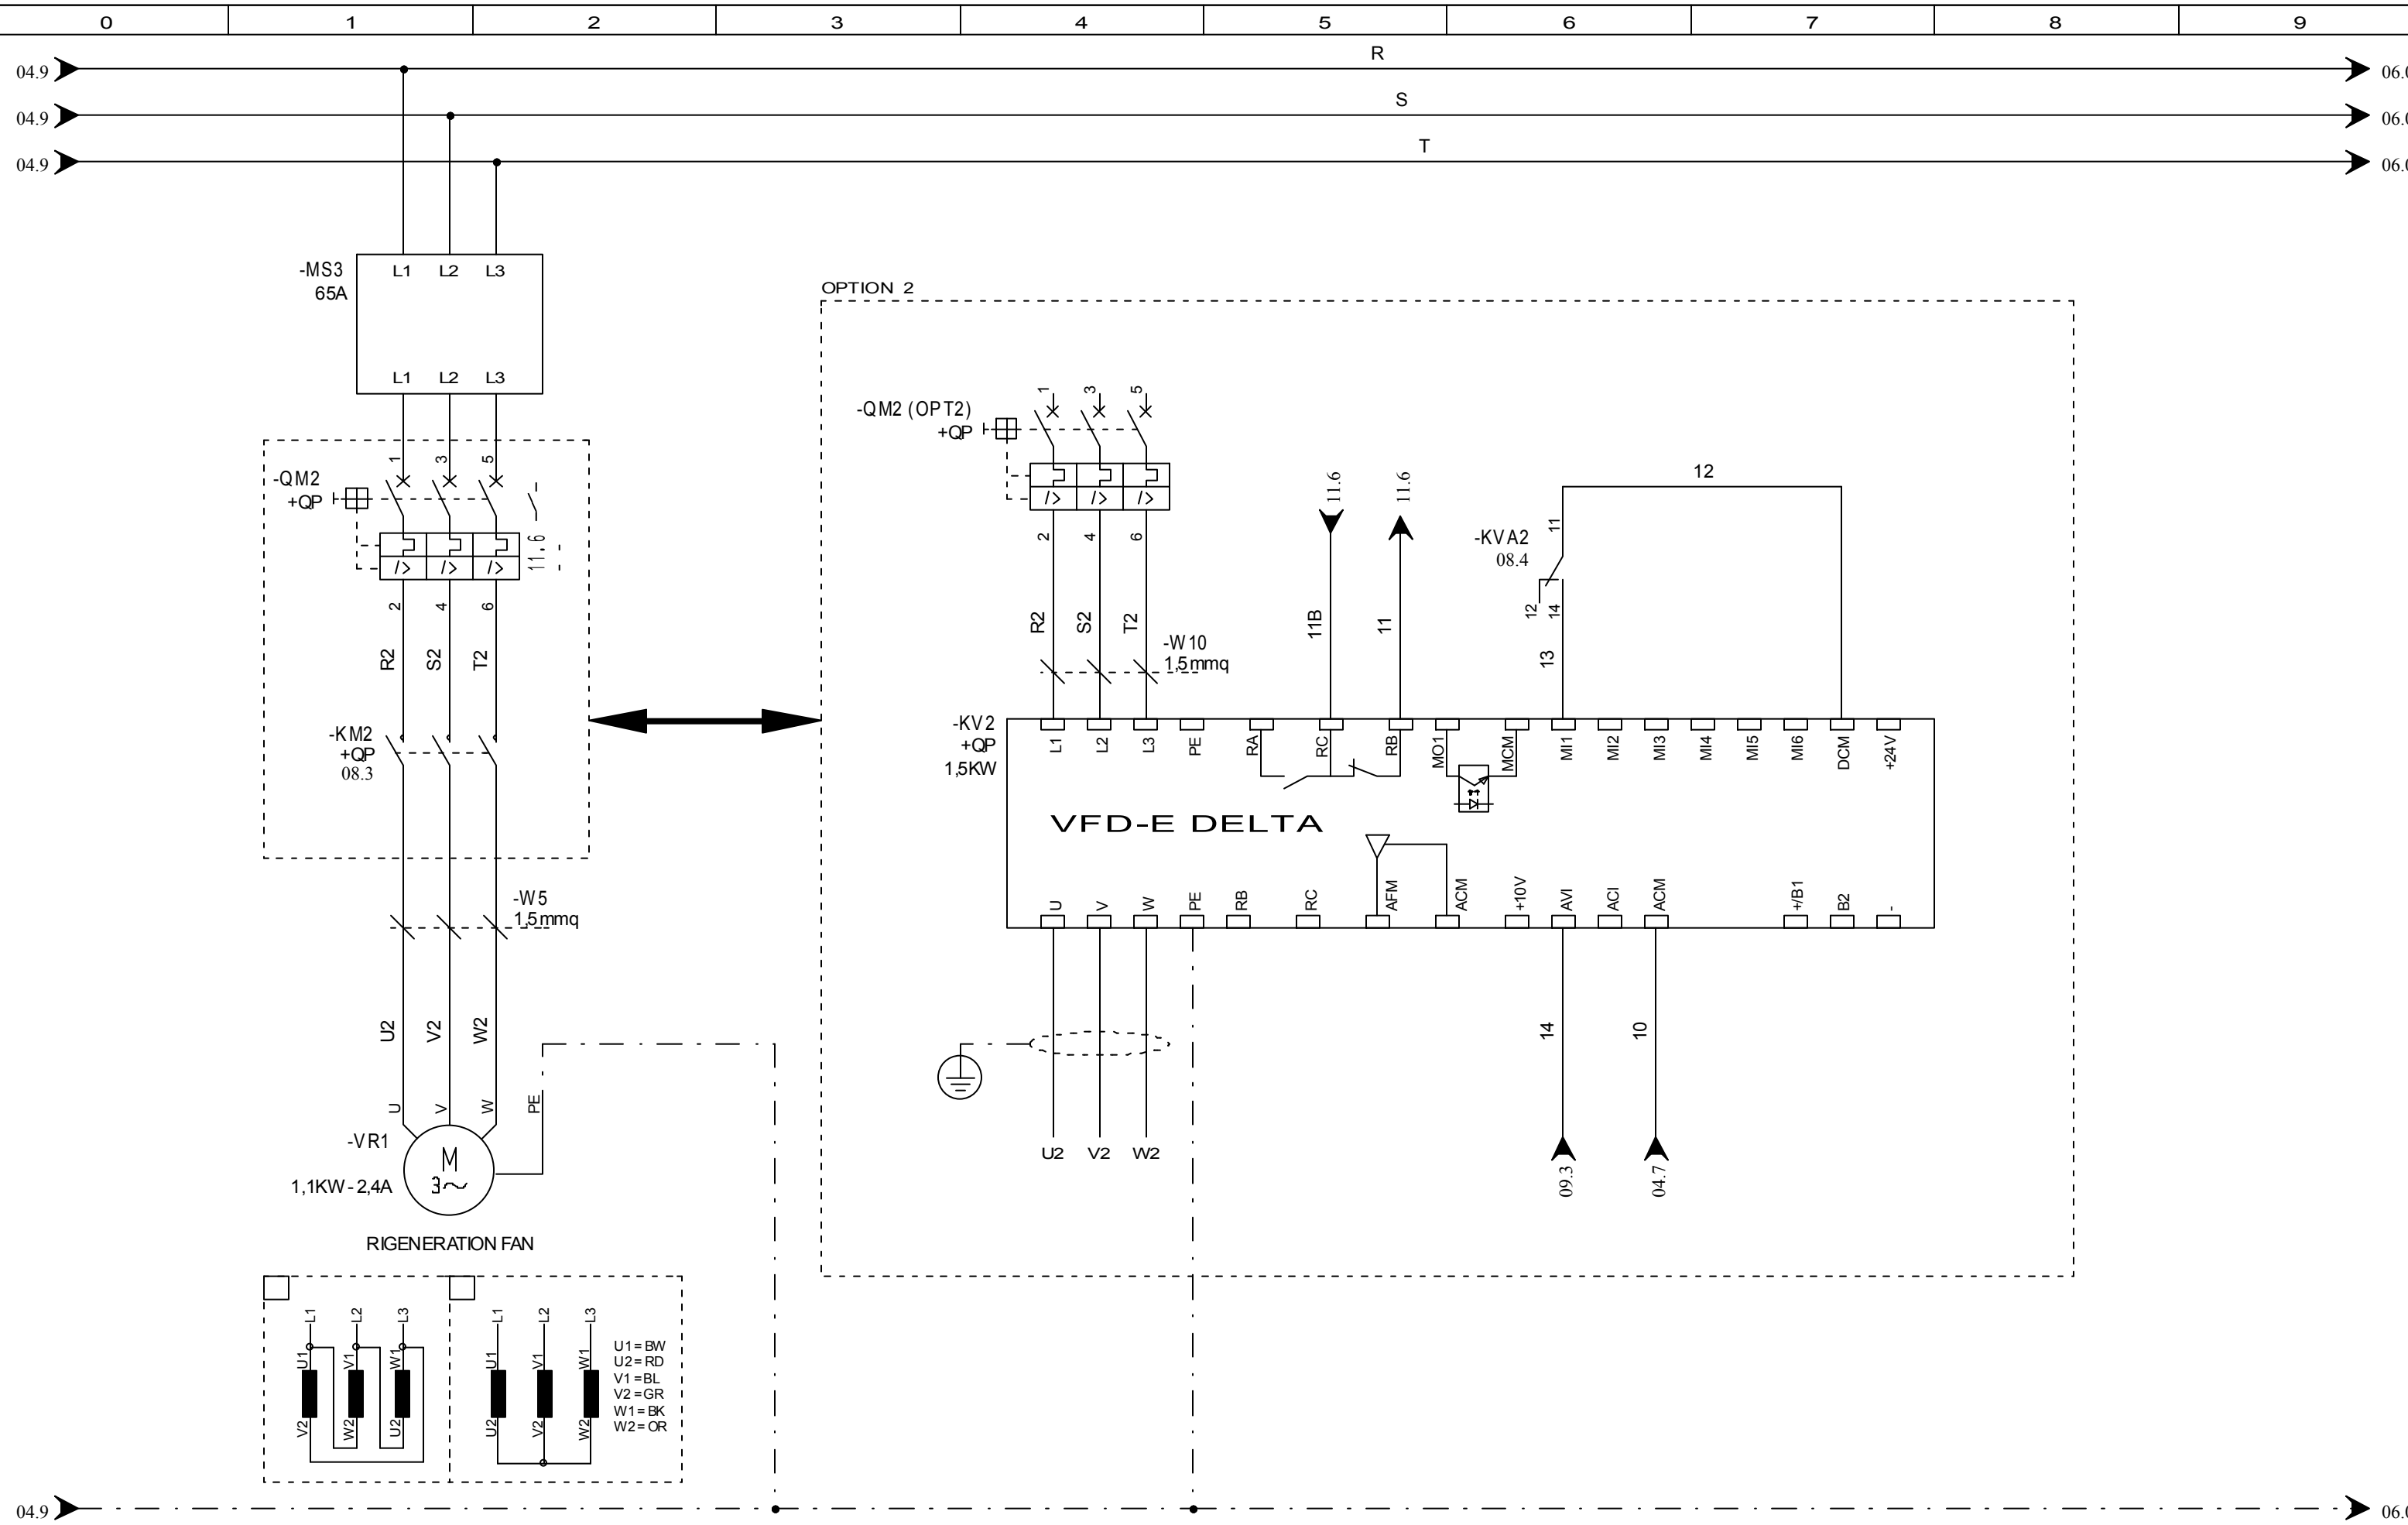

REV.	DATE	SIGNAT.	CHANGE



Via J.F.Kennedy, 25/27/29 - 56020 Capanne Z.I.Fontanelle

PROJECT: AD5000E (React.Elect.)

CUSTOMER: -

COMMITTED:-

TITLE: Circuito Potenza

DRA.: 01


DATE: 12/11/2018

LOC.:


SHEET 05

OF 18

04◀▶06

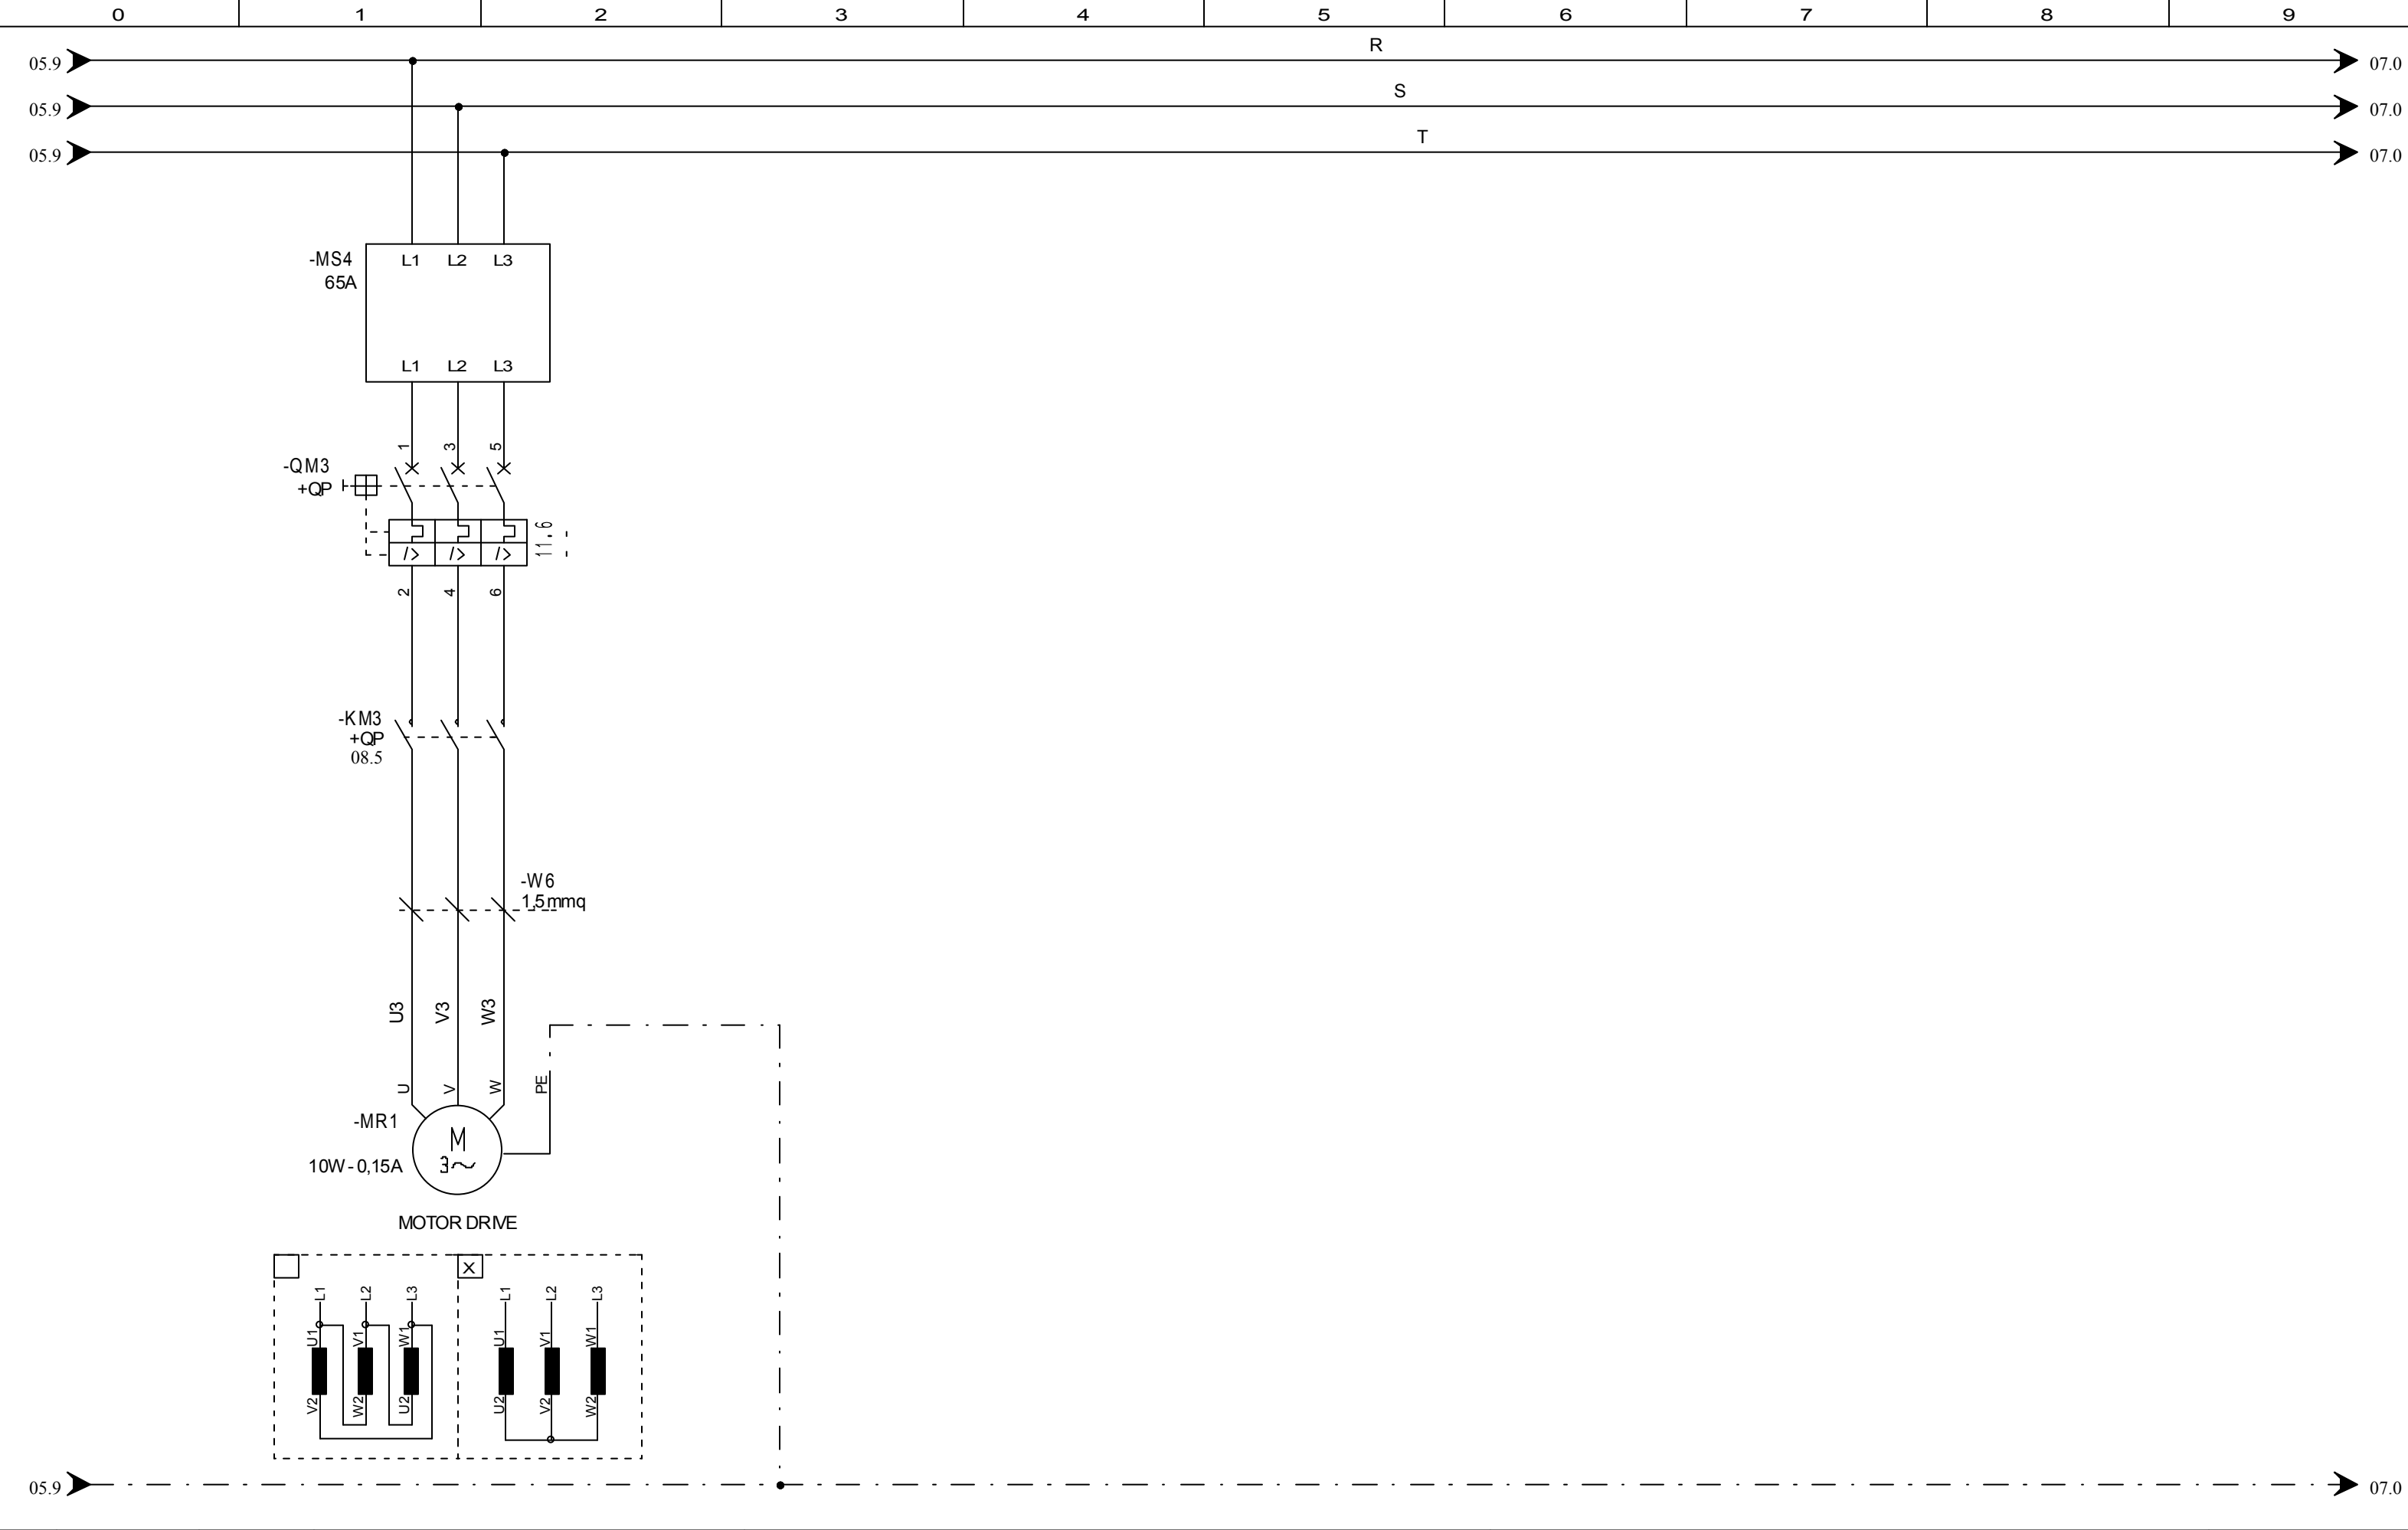

				 DRY AIR SOLUTIONS Via J.F.Kennedy, 25/27/29 - 56020 Capanne Z.I.Fontanelle	PROJECT: AD5000E (React.Elect.)			SHEET 06
					CUSTOMER: -			
					COMMITTED:-			
					TITLE: Circuito Potenza			OF 18
REV.	DATE	SIGNAT.	CHANGE		DRA.: 01	DATE: 12/11/2018	LOC.:	05◀▶07

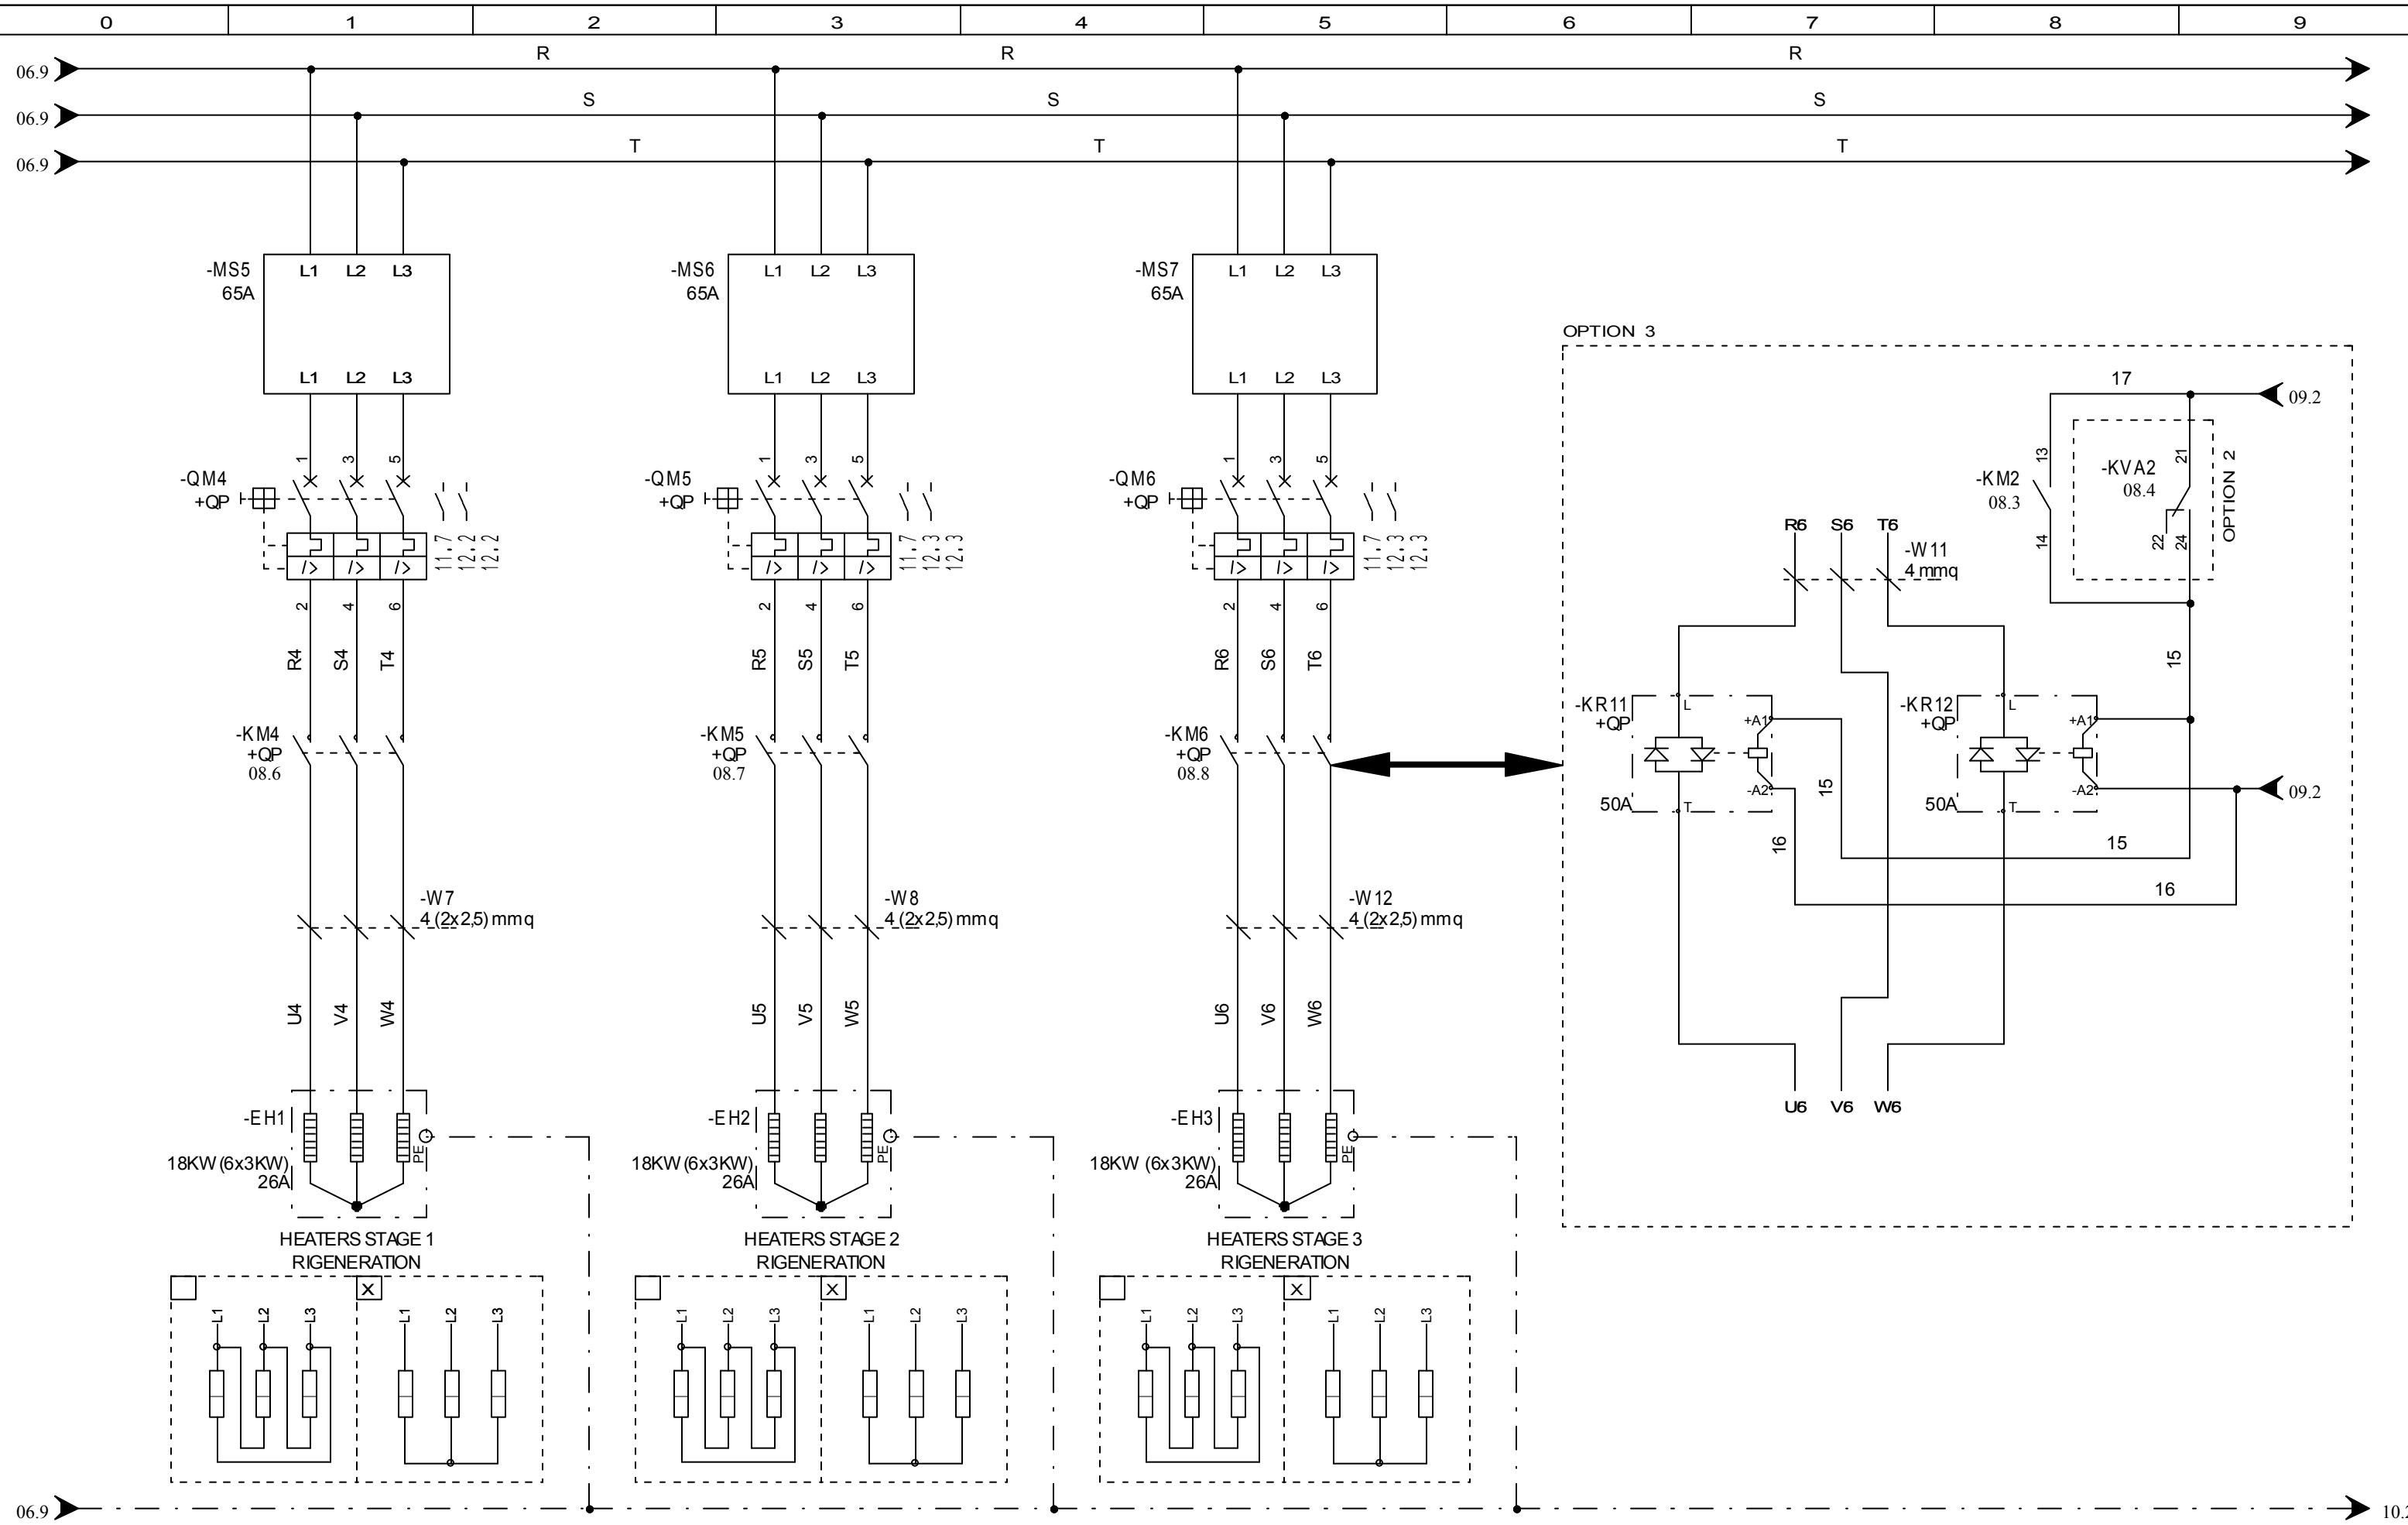


REV.	DATE	SIGNAT.	CHANGE





Via J.F.Kennedy, 25/27/29 - 56020 Capanne Z.I.Fontanelle


PROJECT: AD5000E (React.Elect.)			SHEET 07
CUSTOMER: -			
COMMITTED:-			OF 18
TITLE: Circuito Potenza			06◀▶08
DRA.: 01	DATE: 12/11/2018	LOC.:	




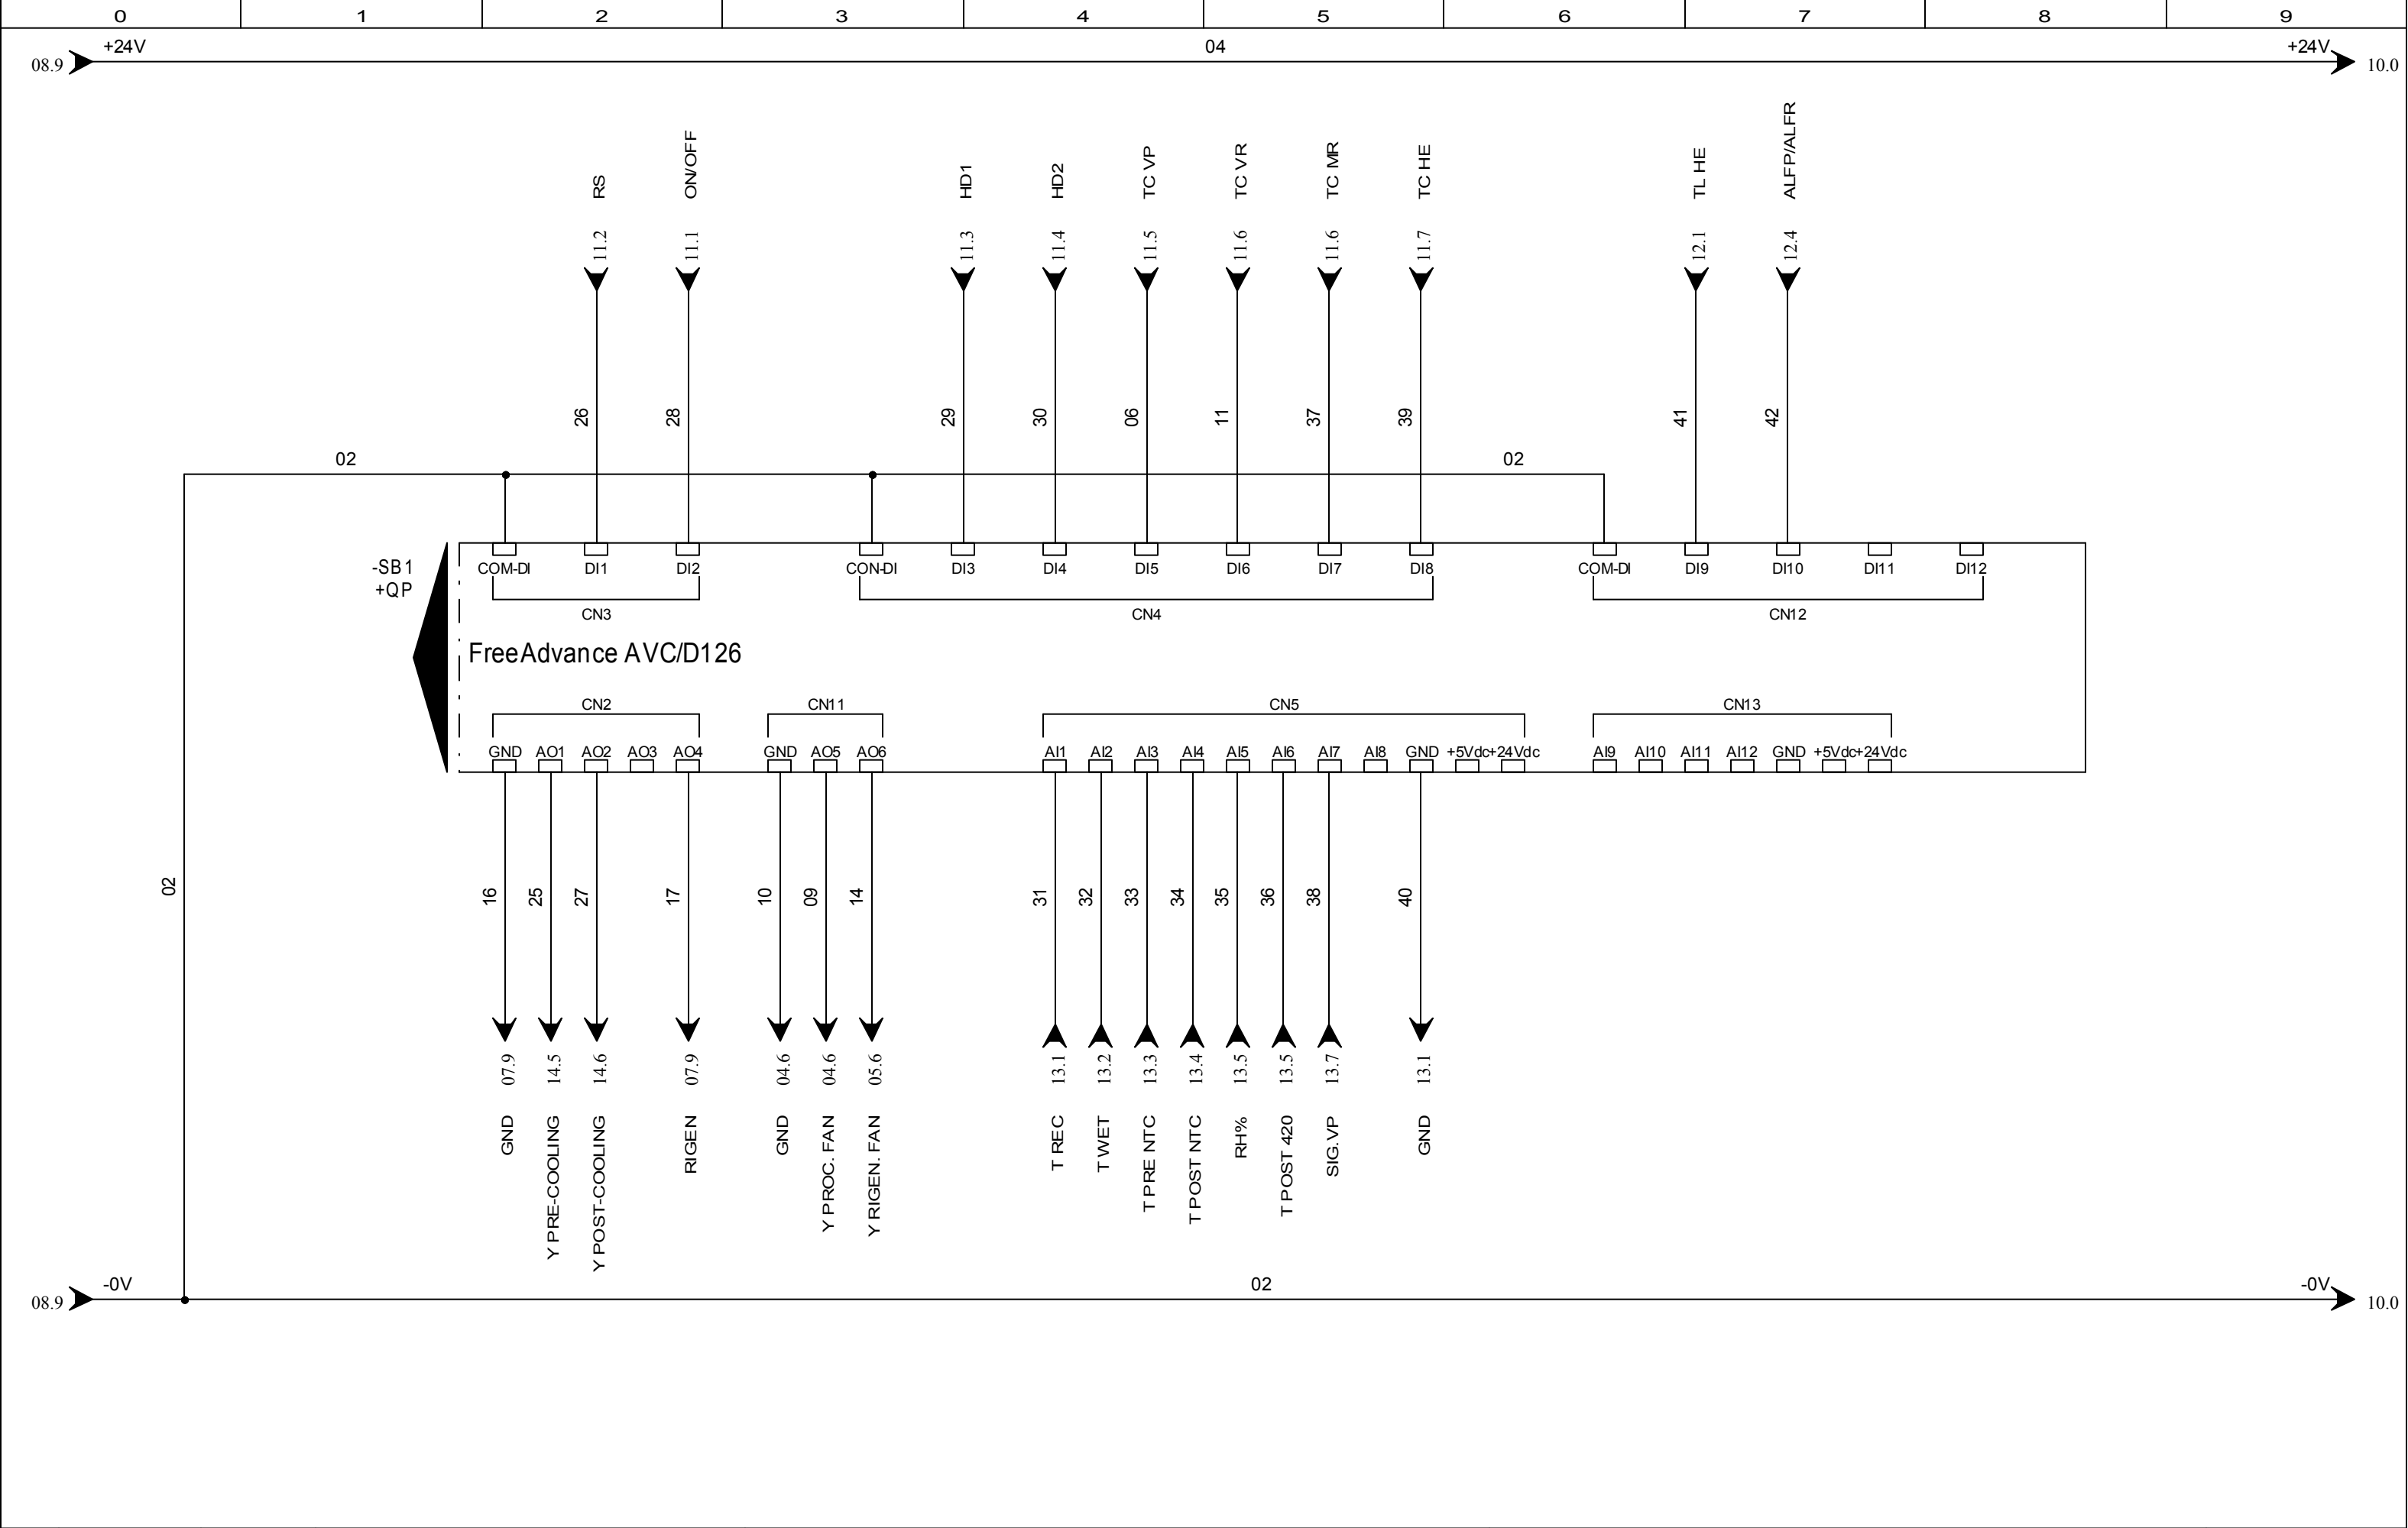


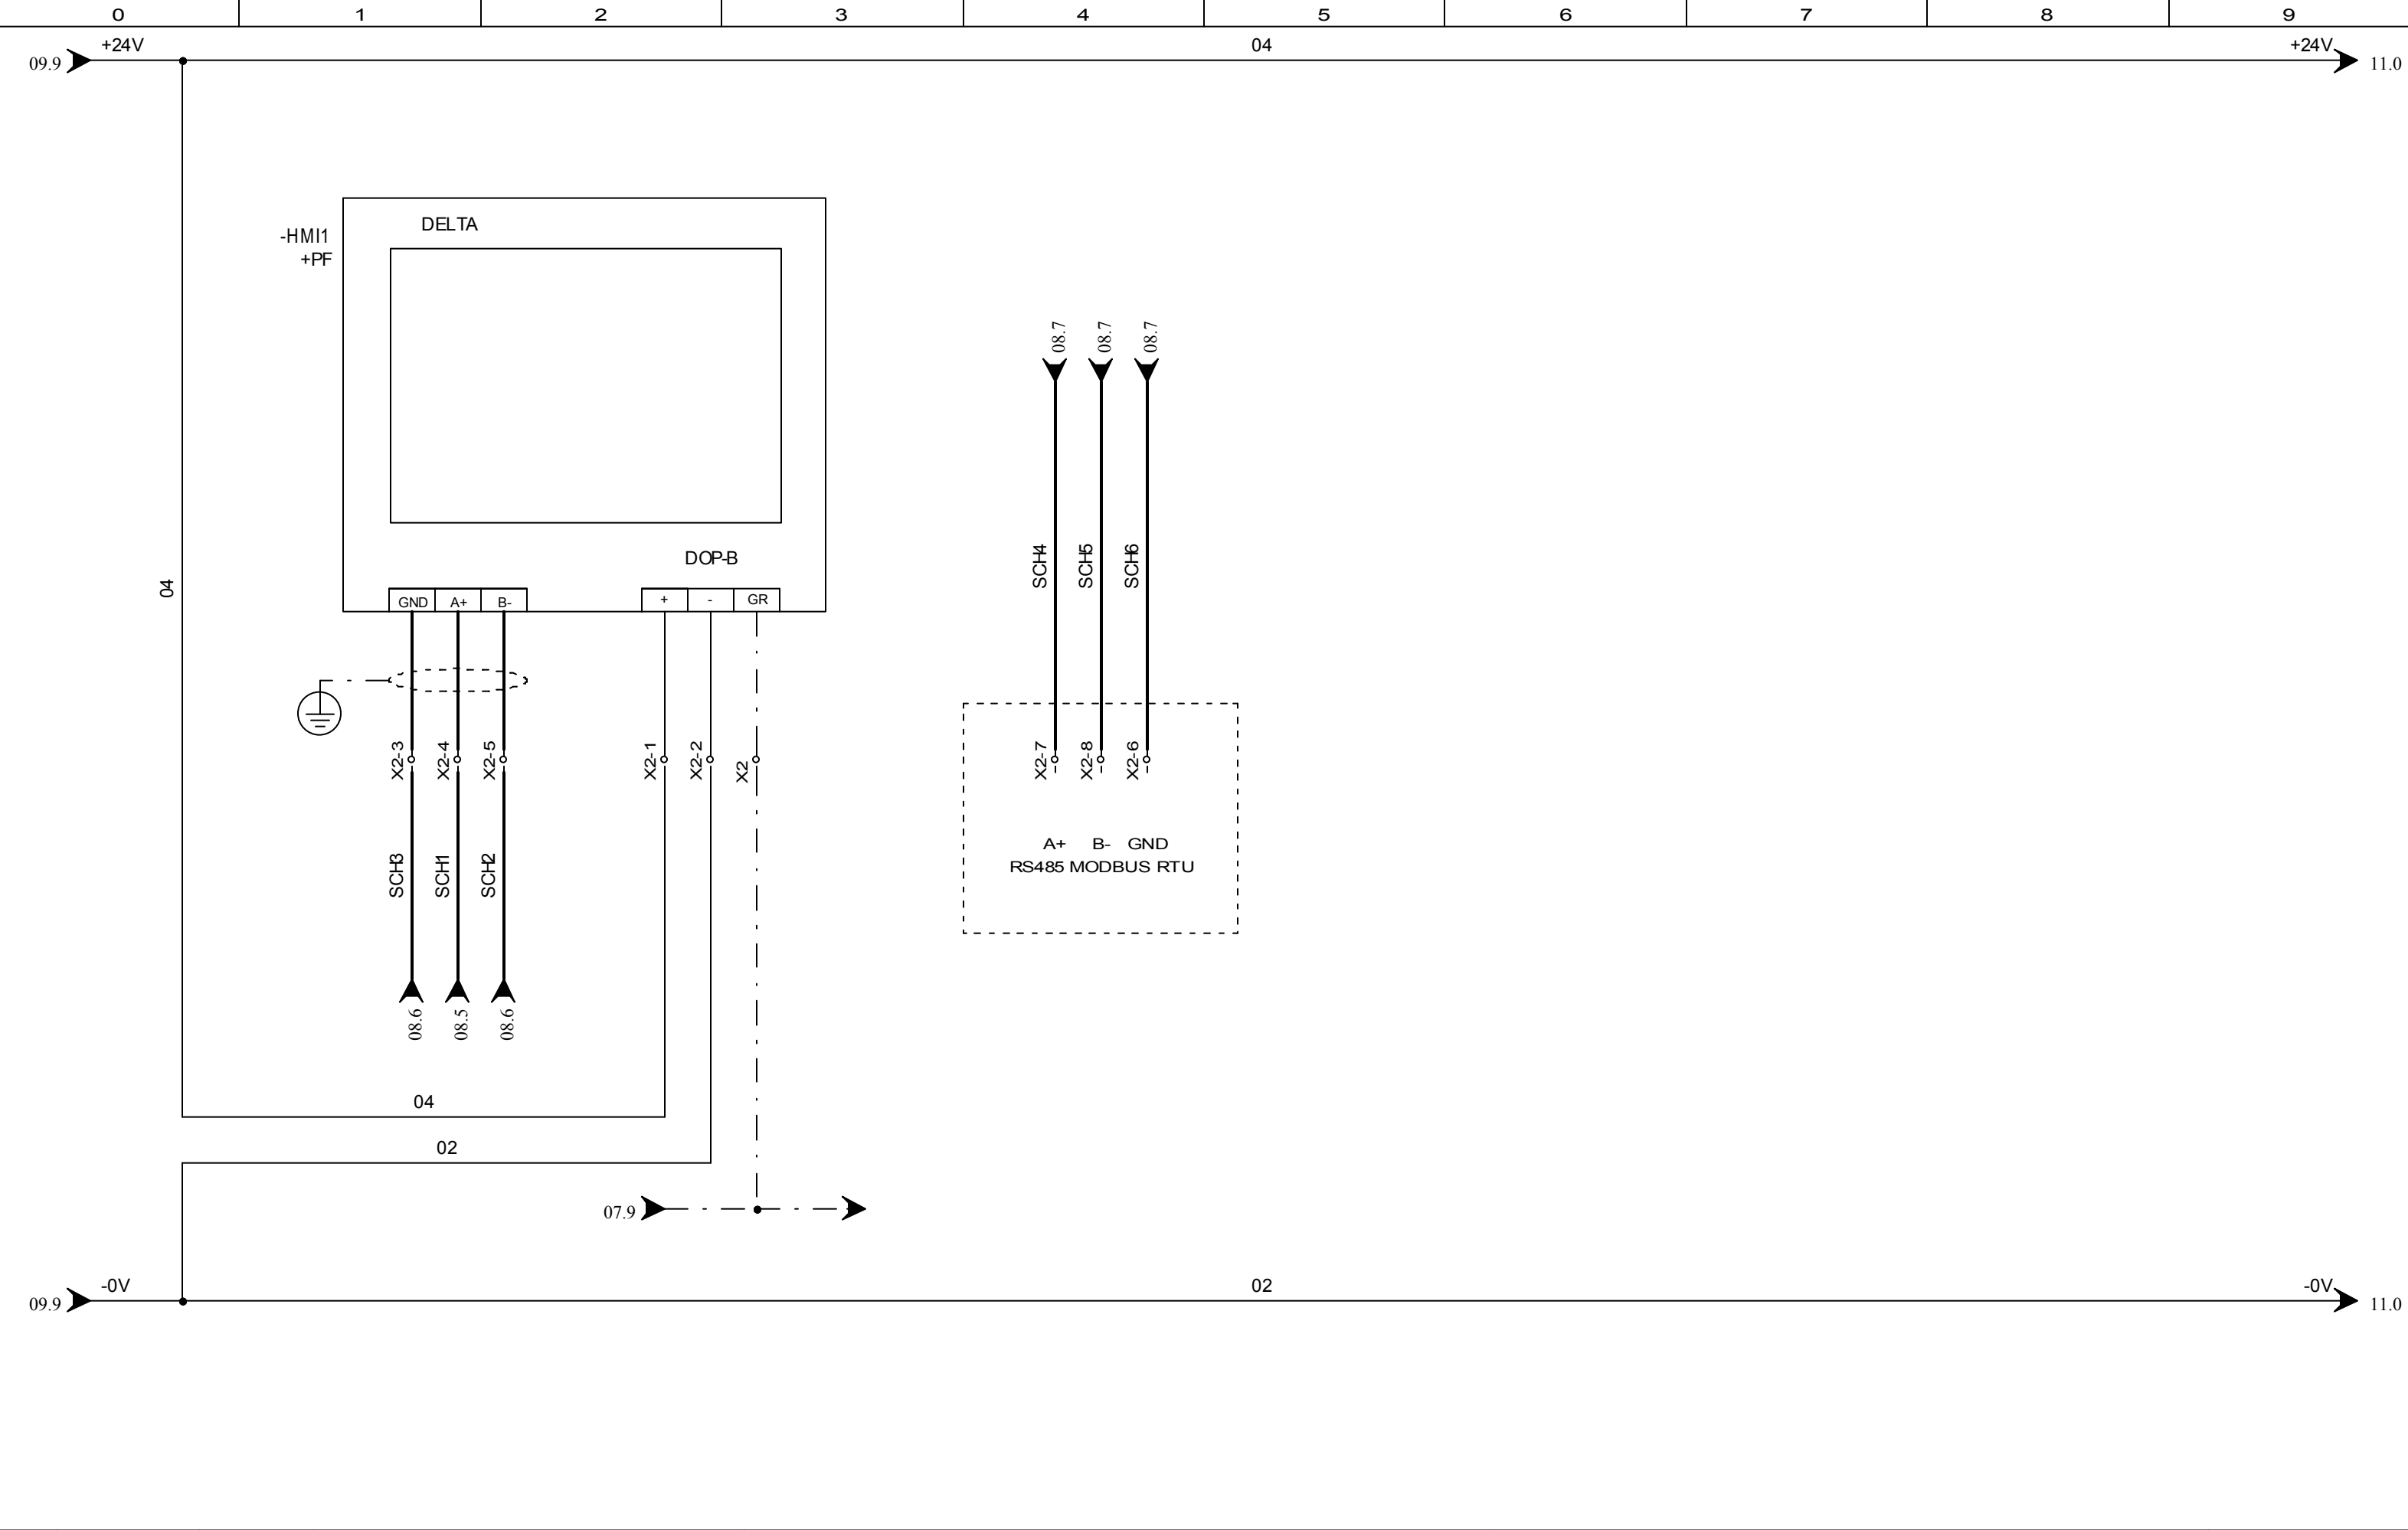


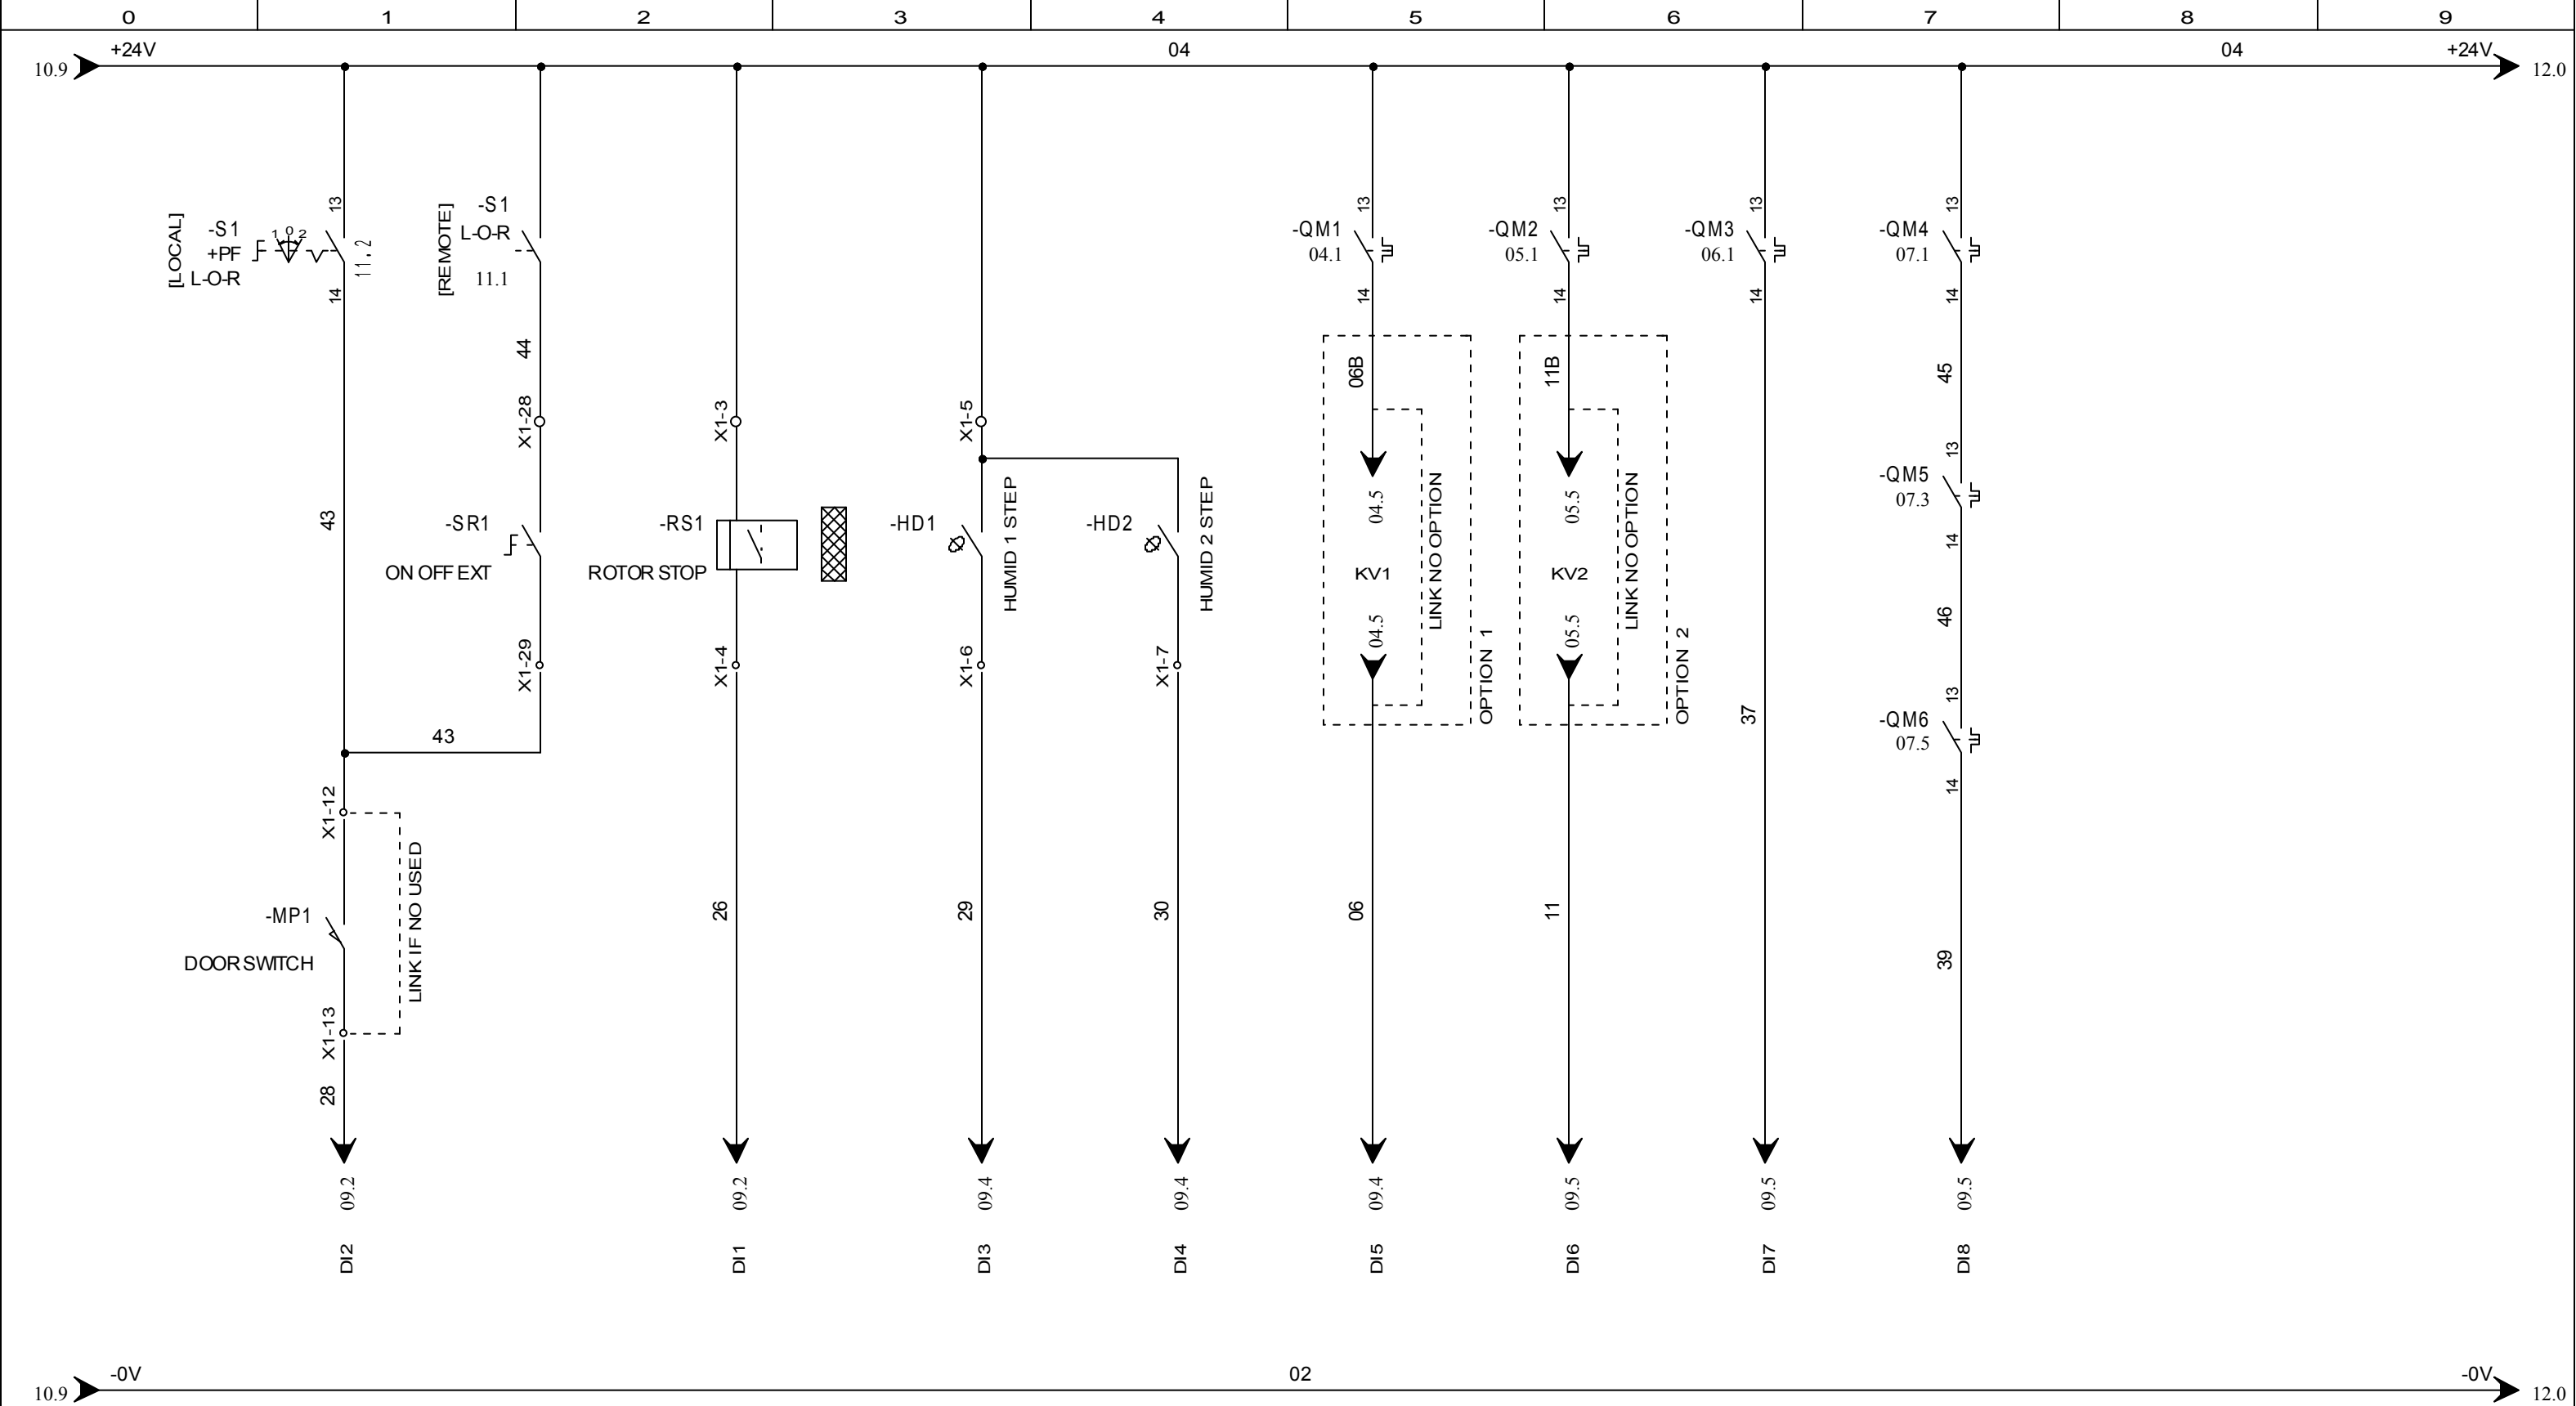


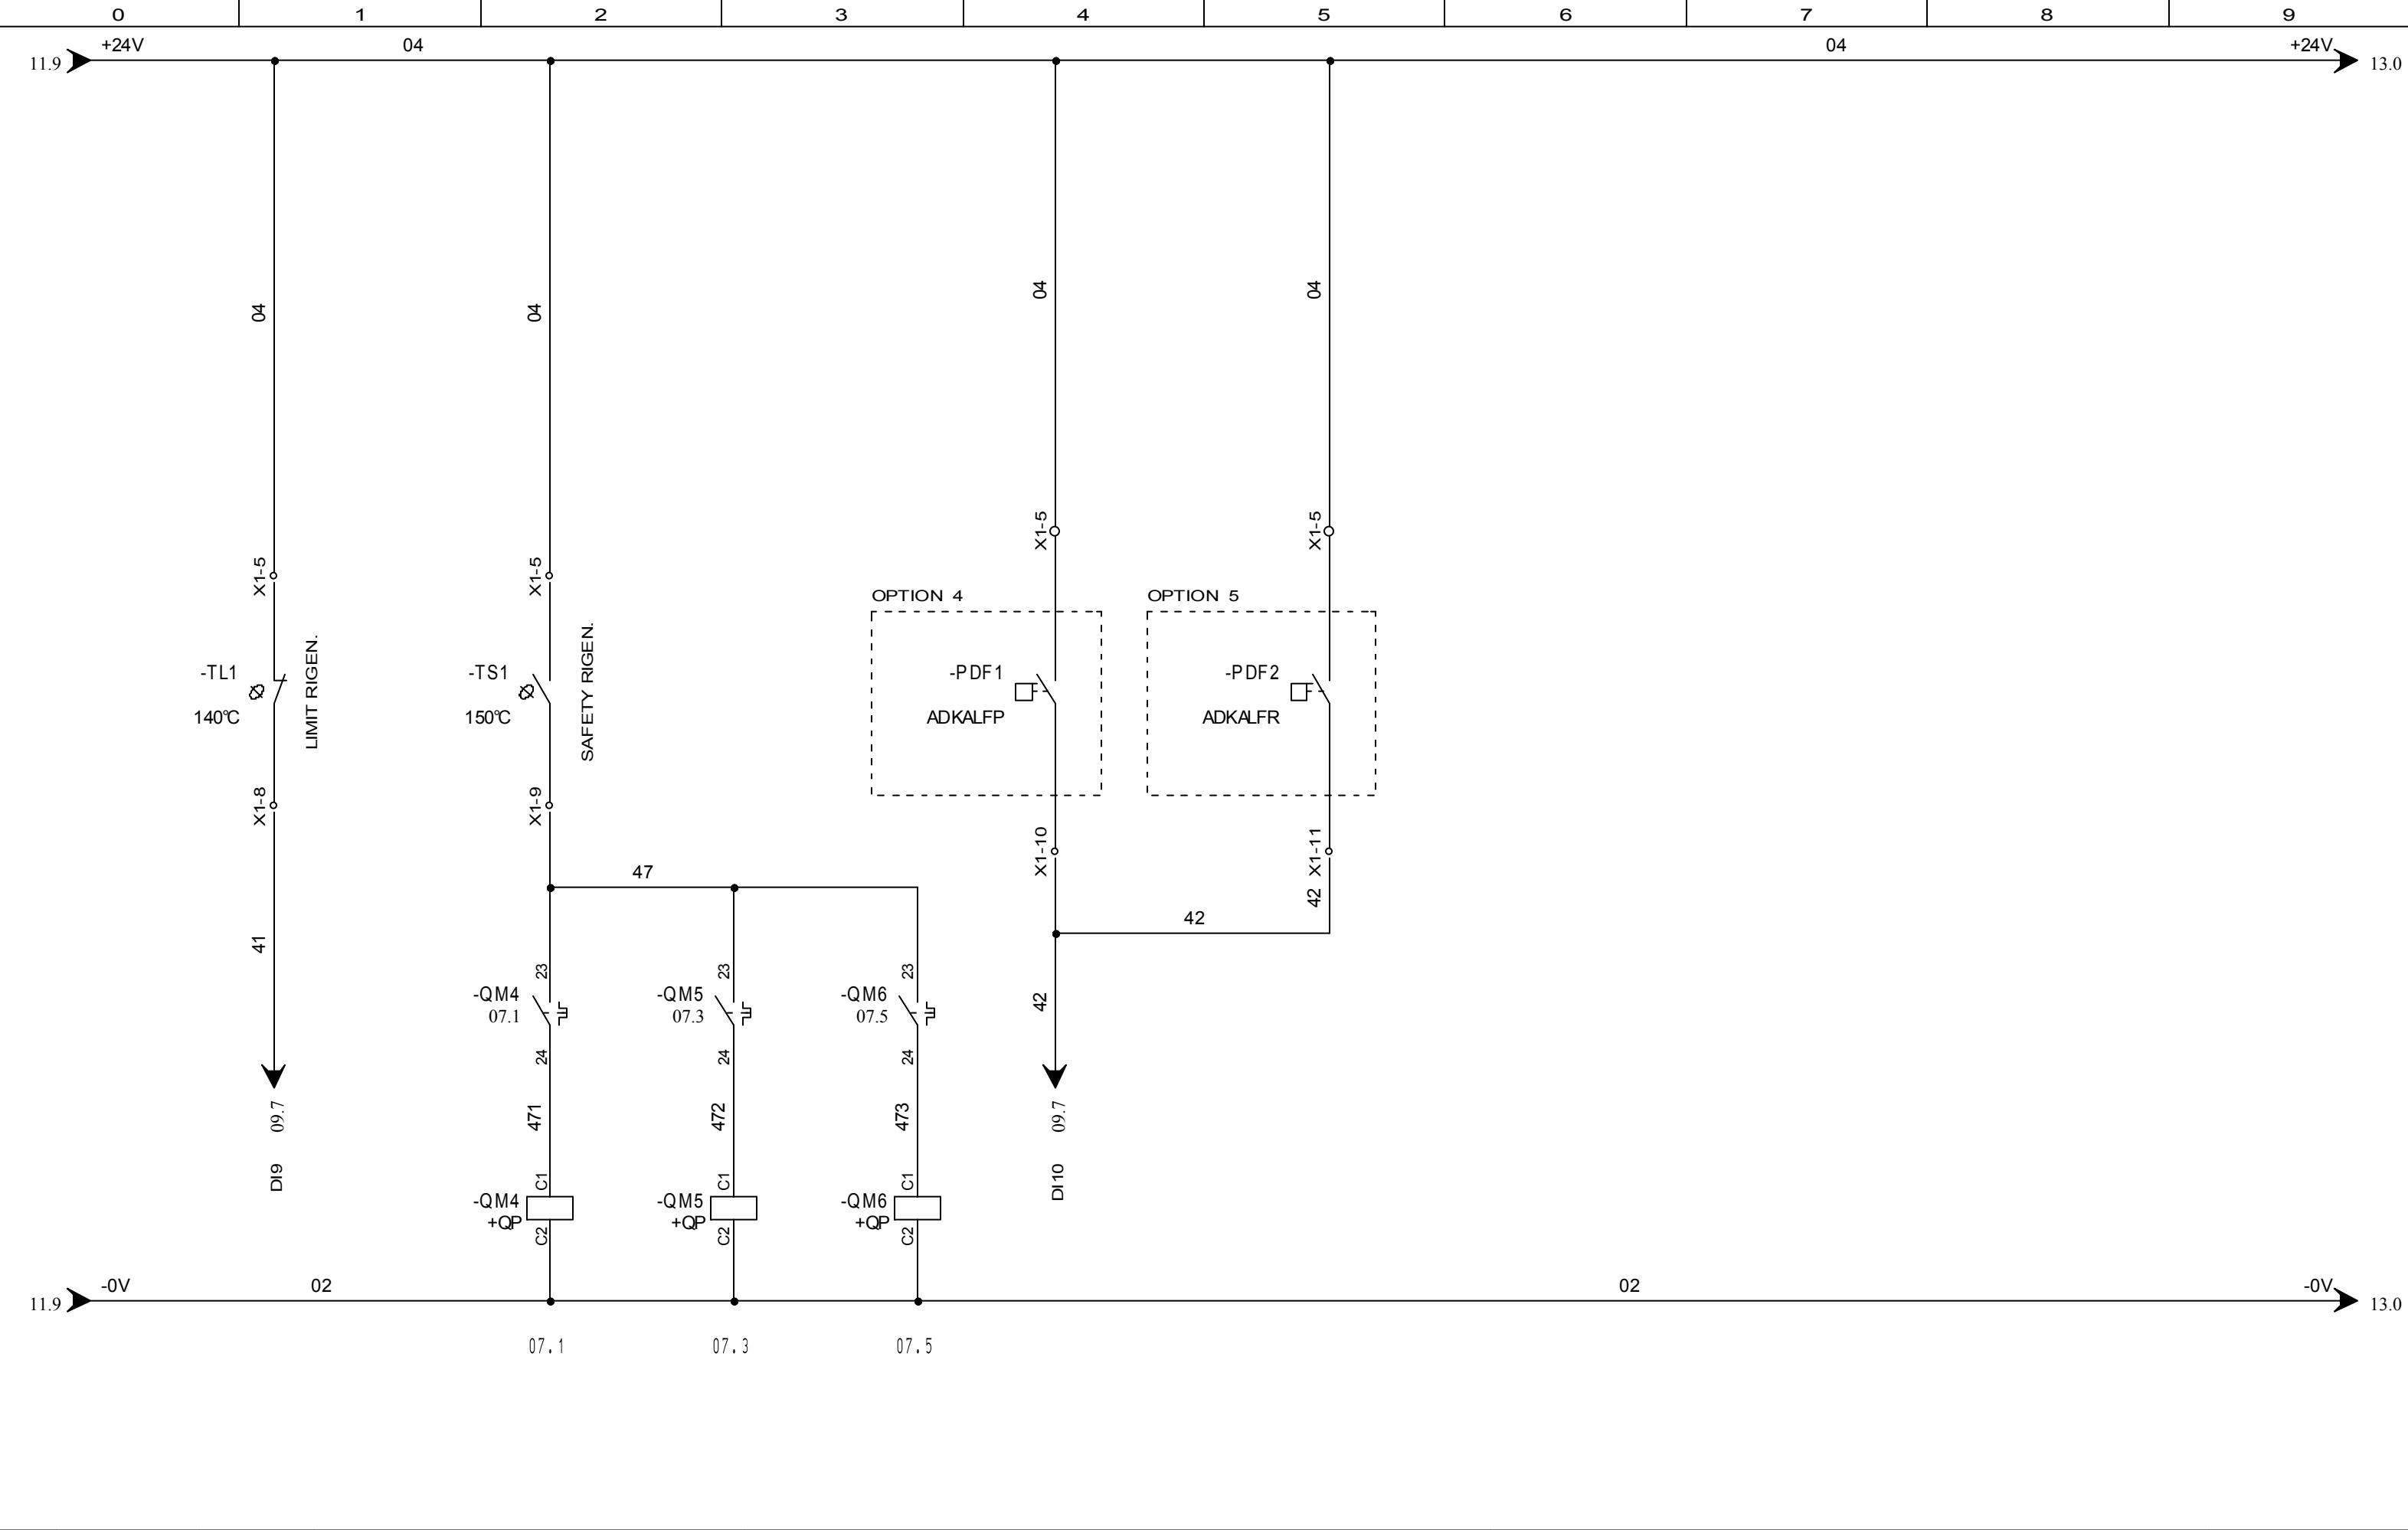

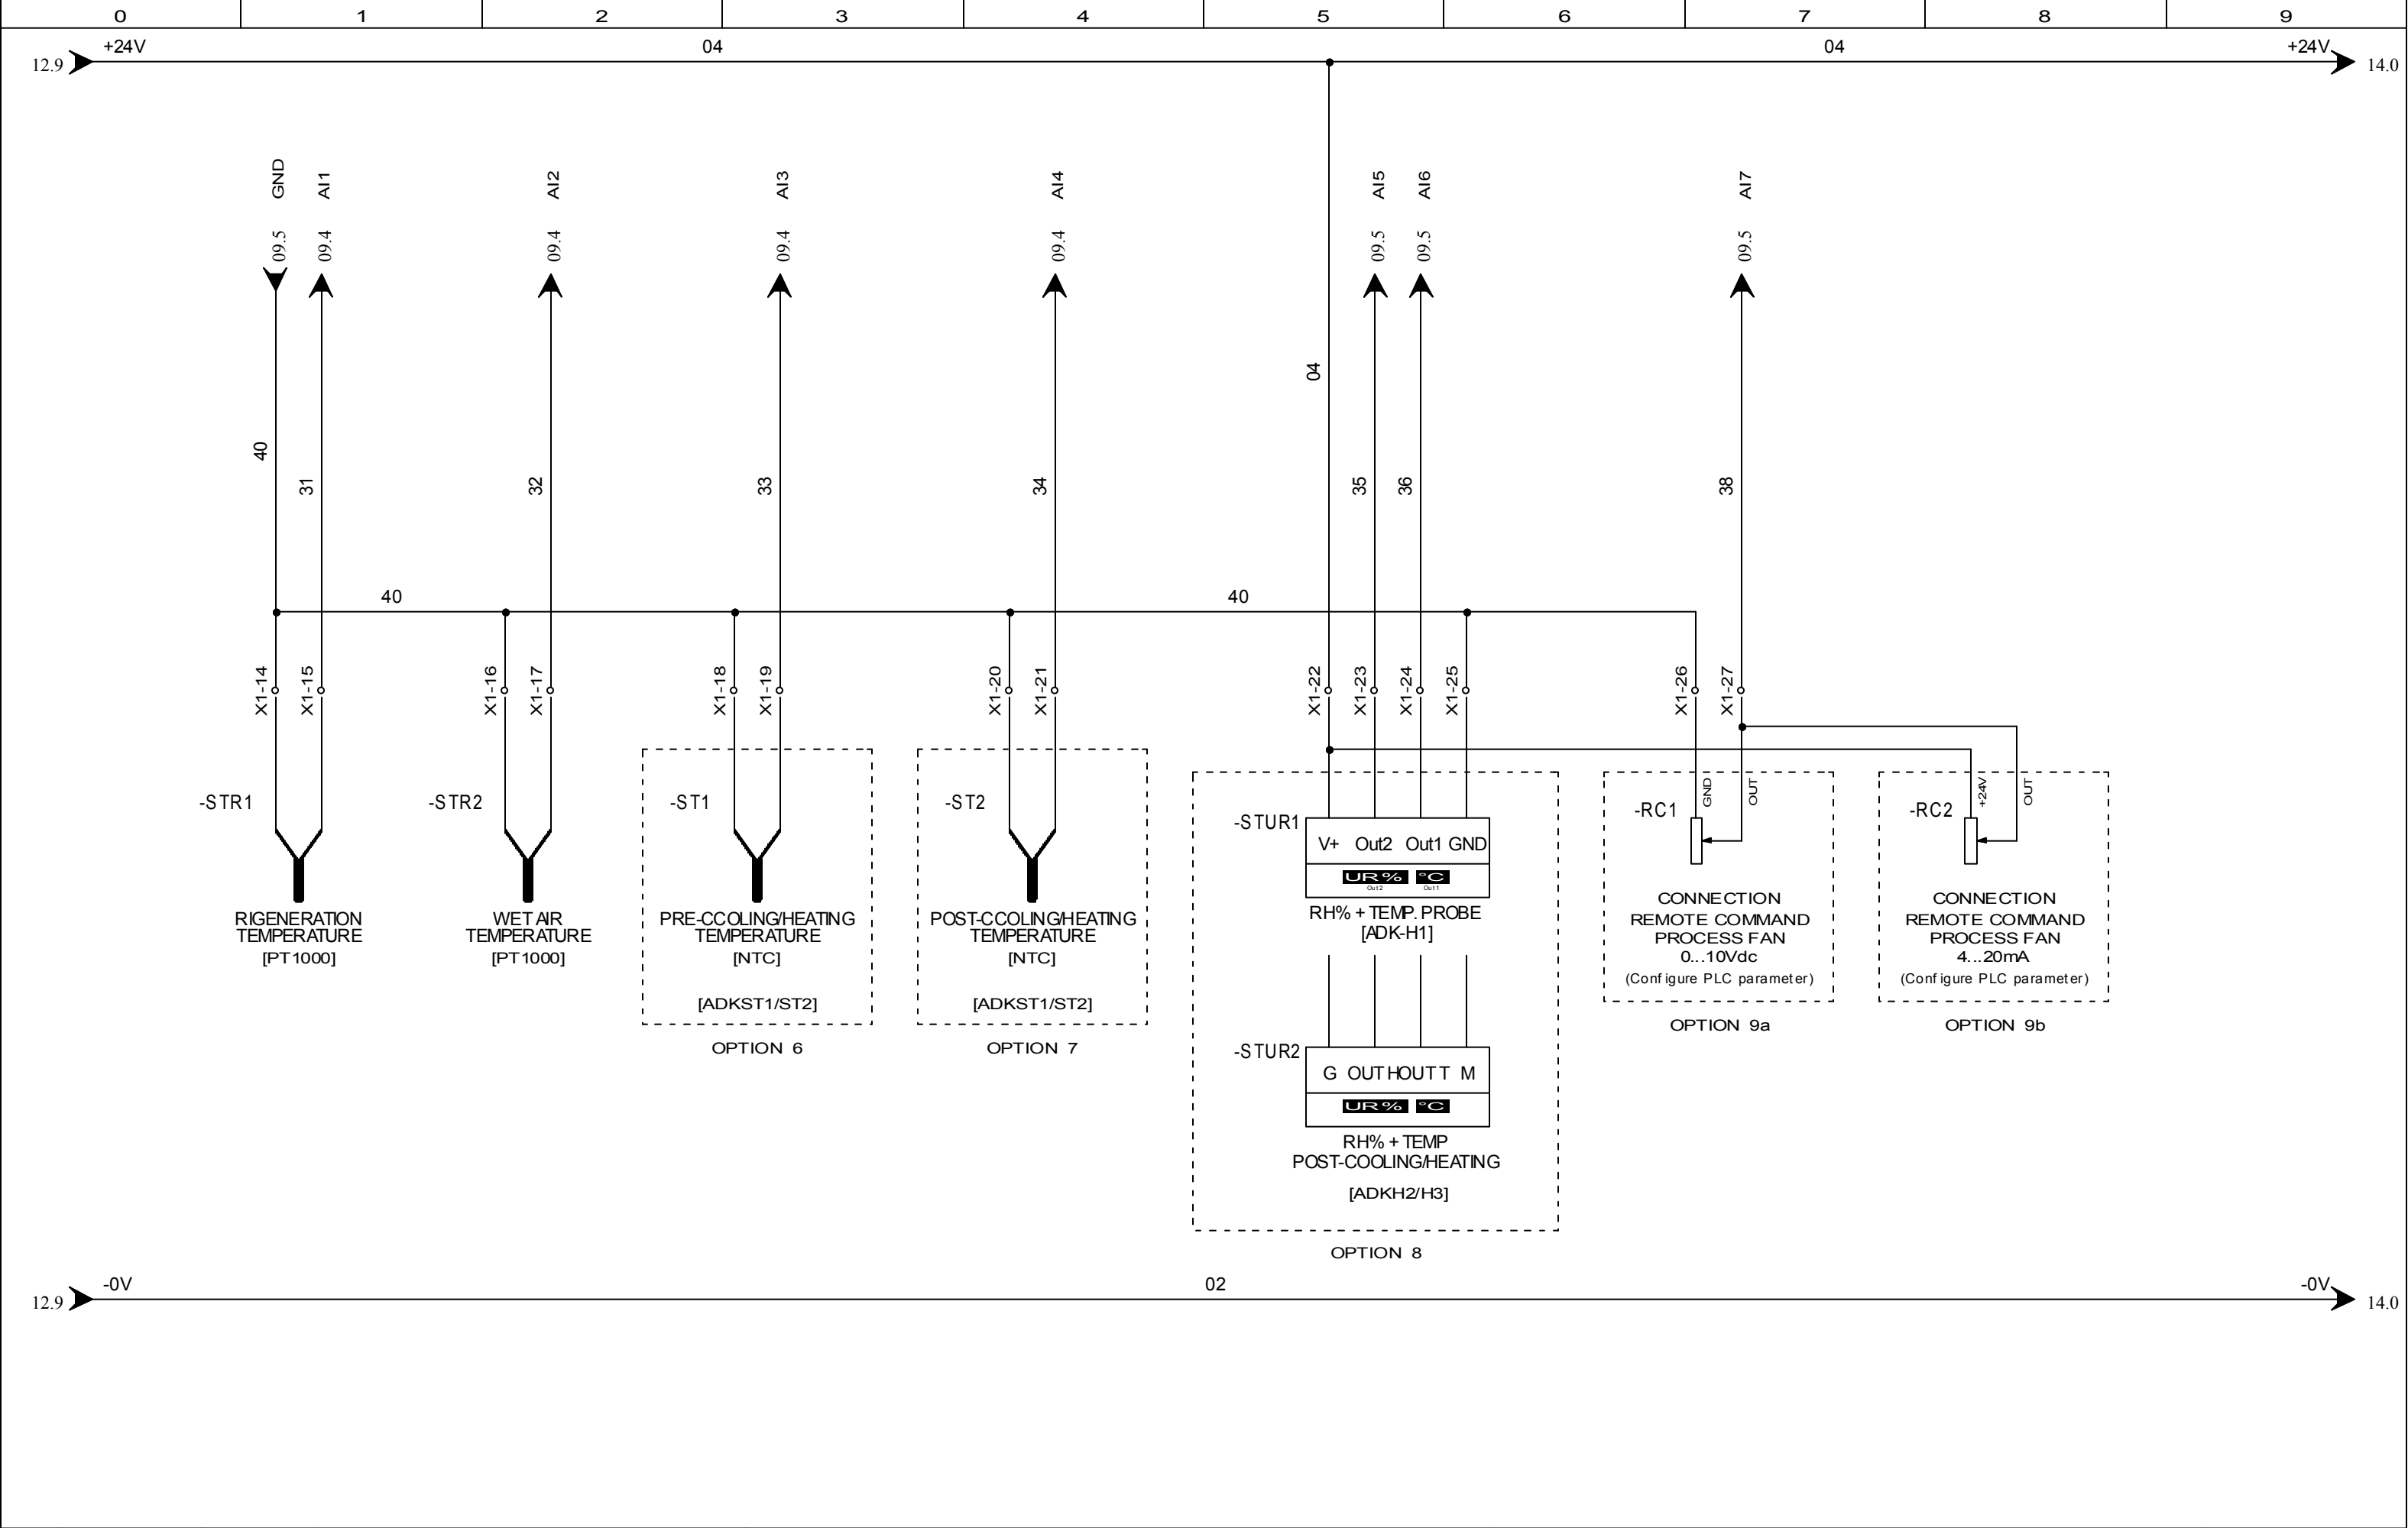


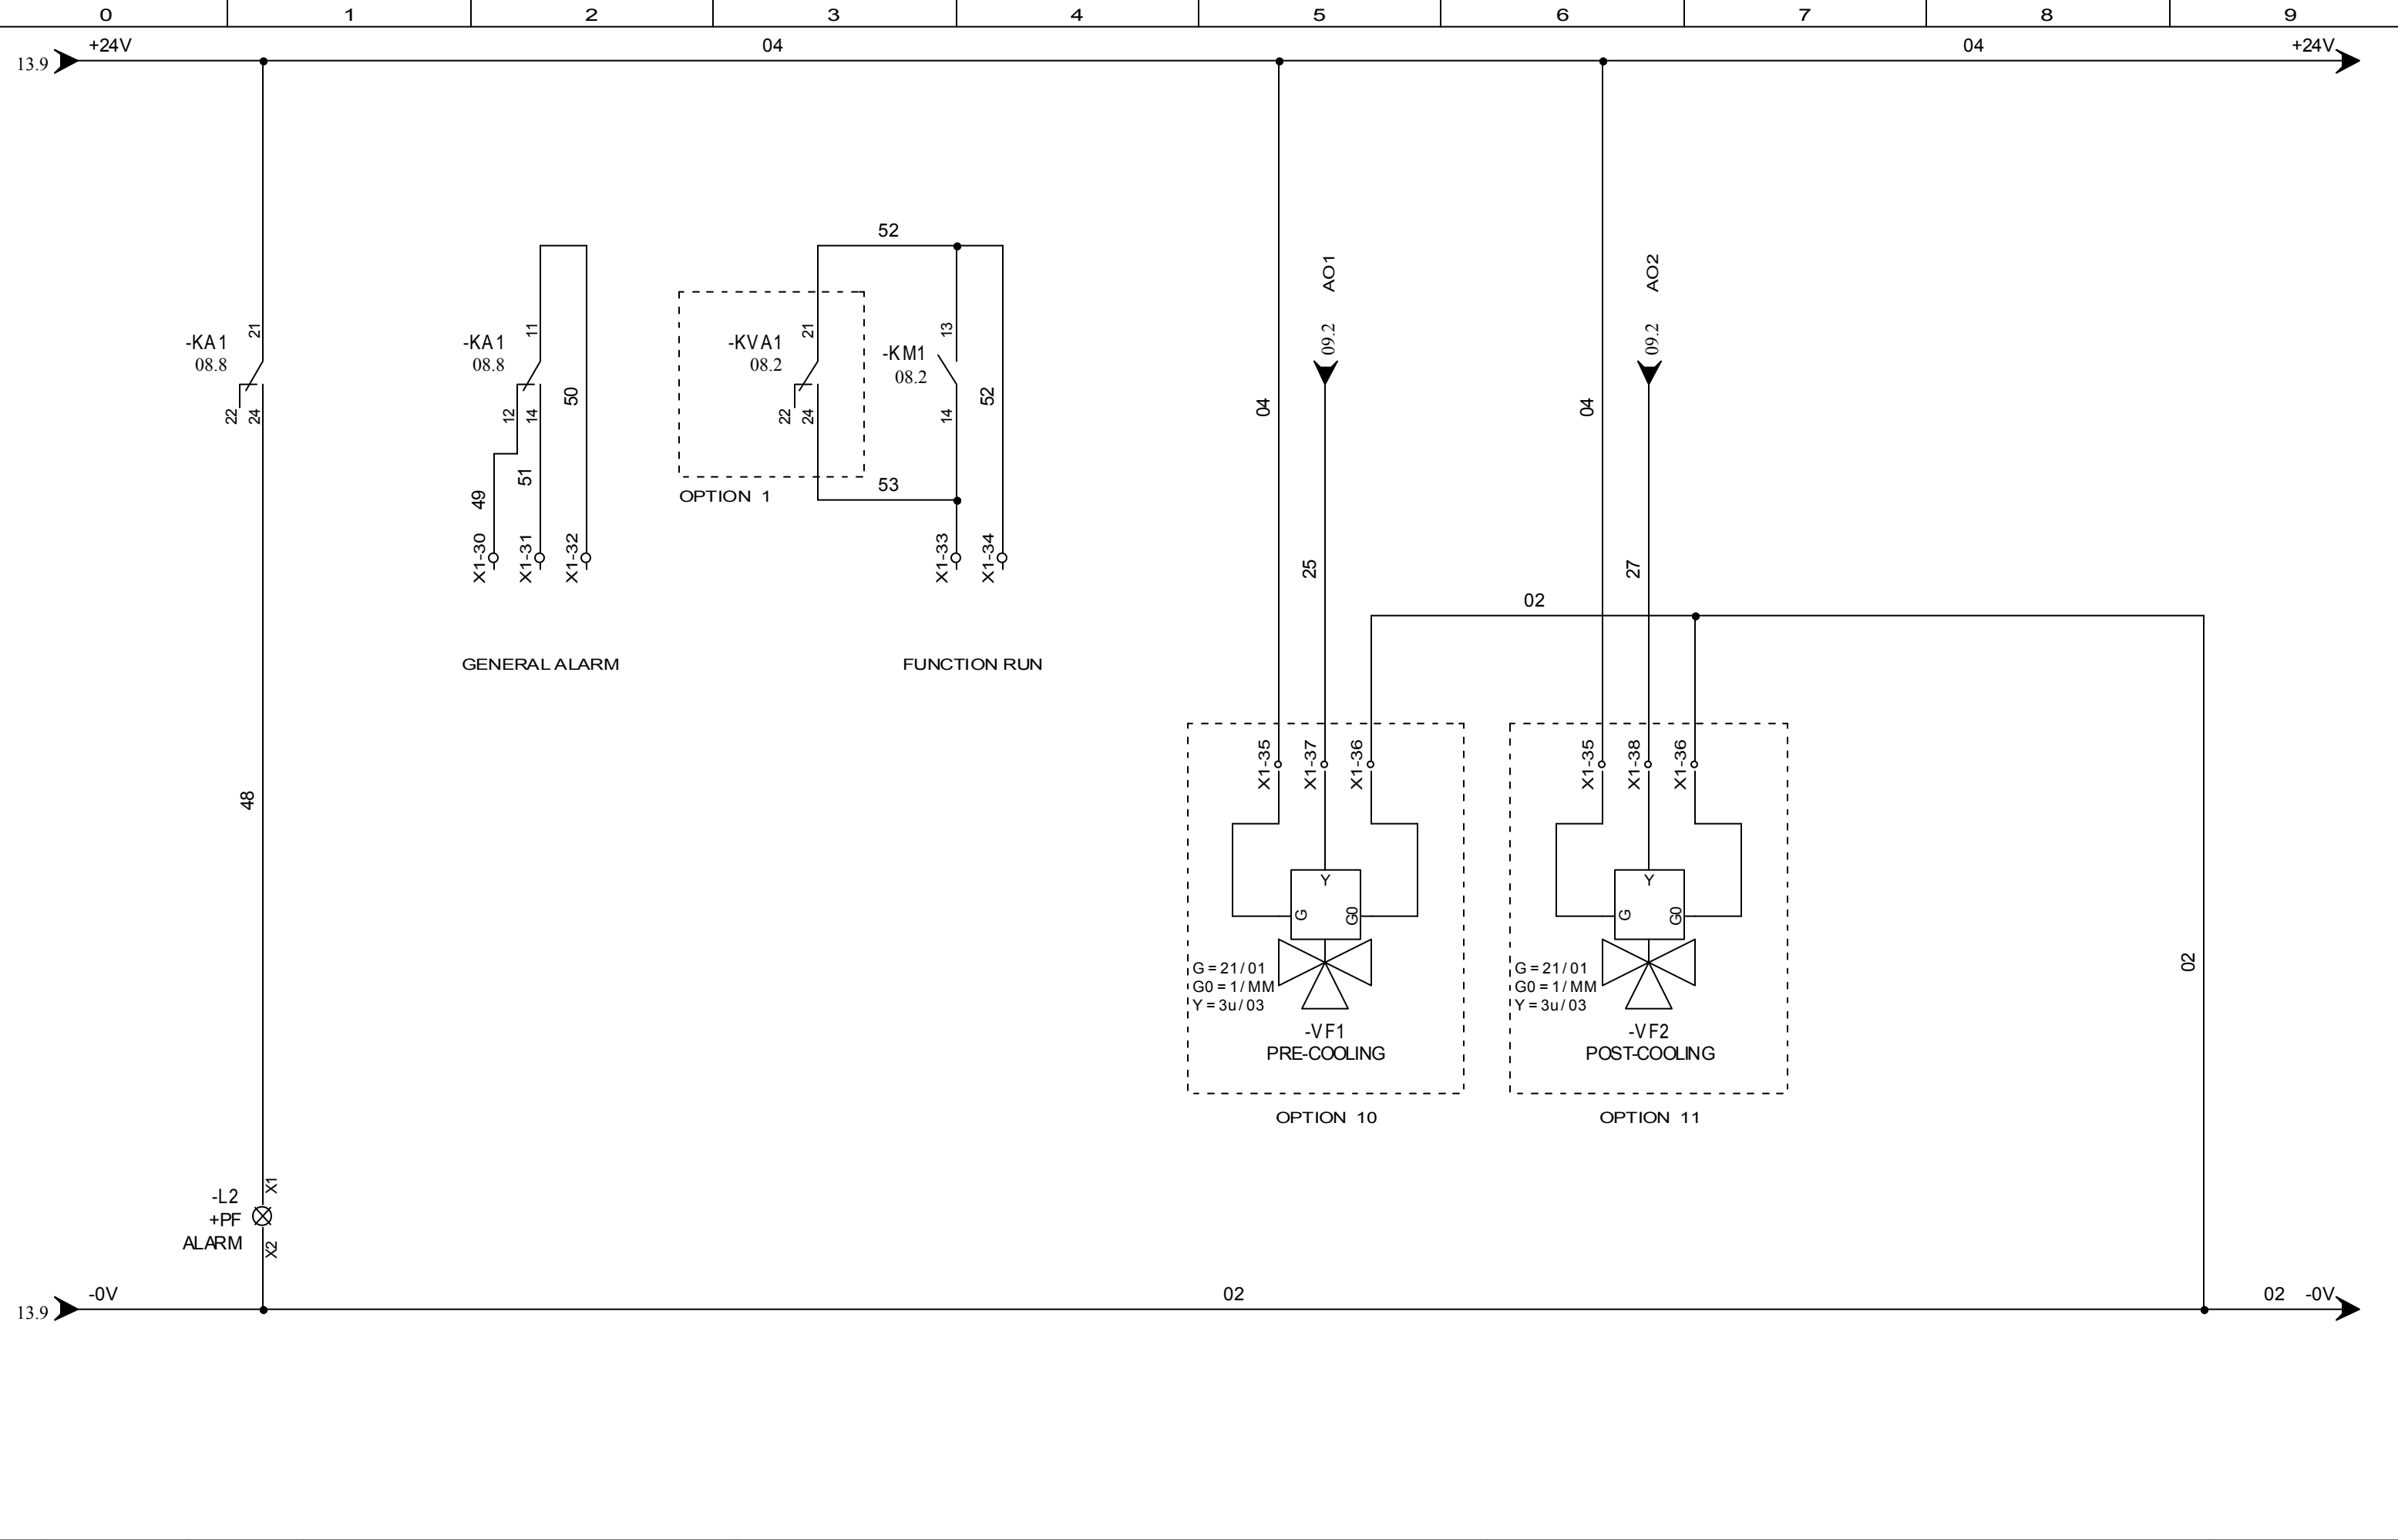

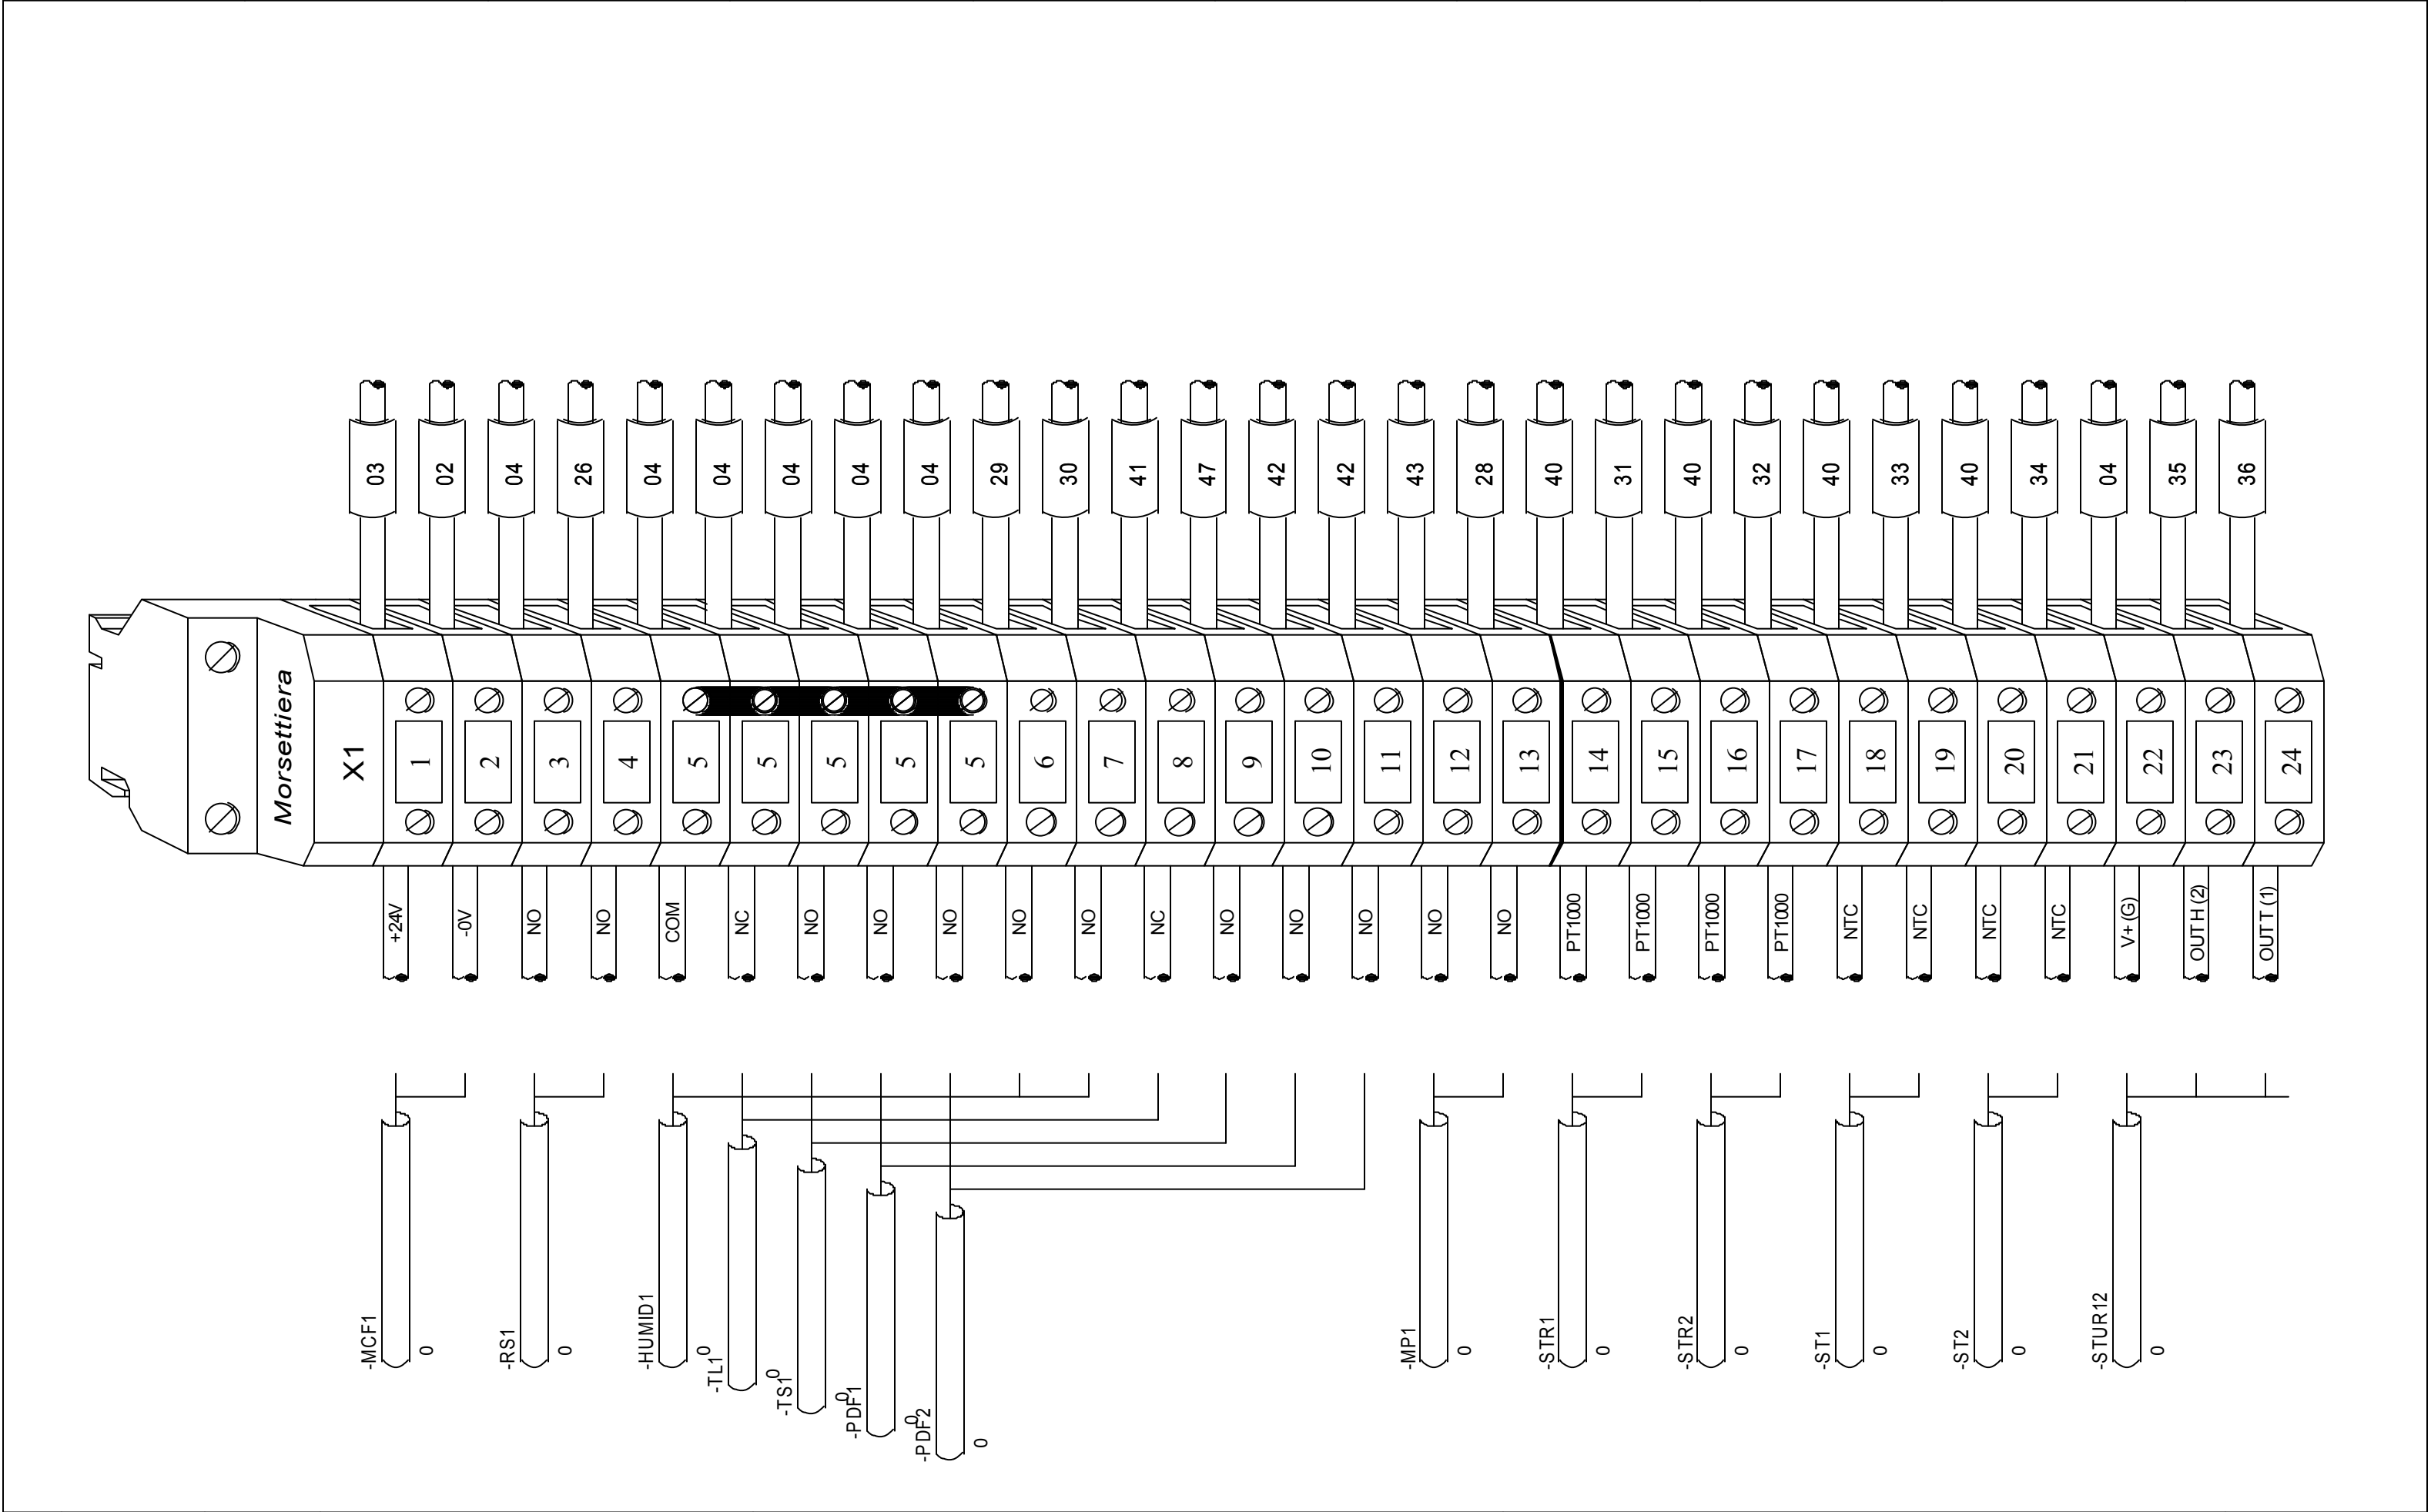

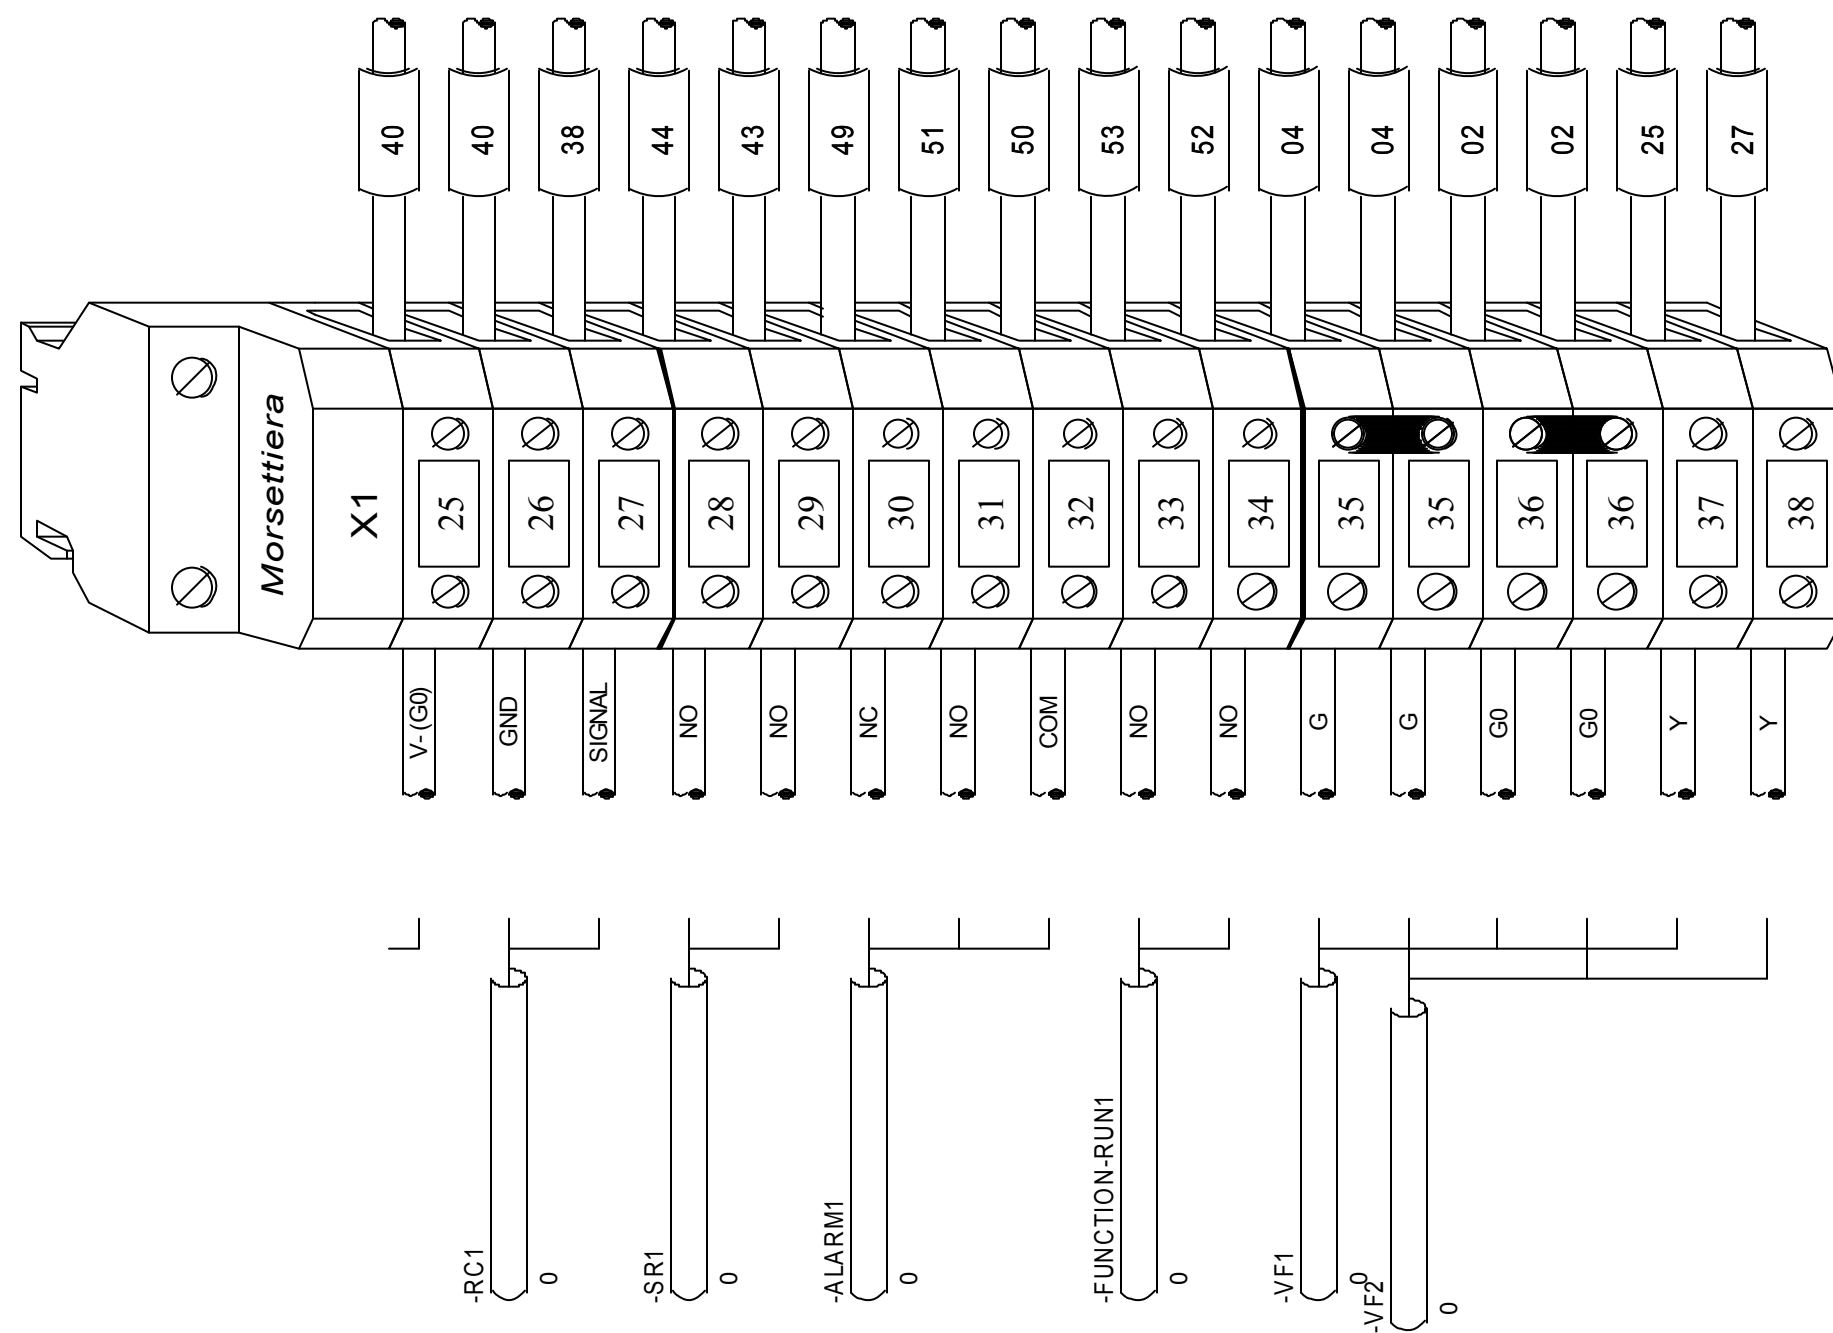

				 Via J.F.Kennedy, 25/27/29 - 56020 Capanne Z.I.Fontanelle	PROJECT: AD5000E (React.Elect.)			SHEET 16 OF 18
					CUSTOMER: -			
					COMMITTED:-			
					TITLE: Morsettiera: X1 X1 - 2/2			15◀▶17
REV.	DATE	SIGNAT.	CHANGE		DRA.: 01 DATE: 12/11/2018 LOC.:			

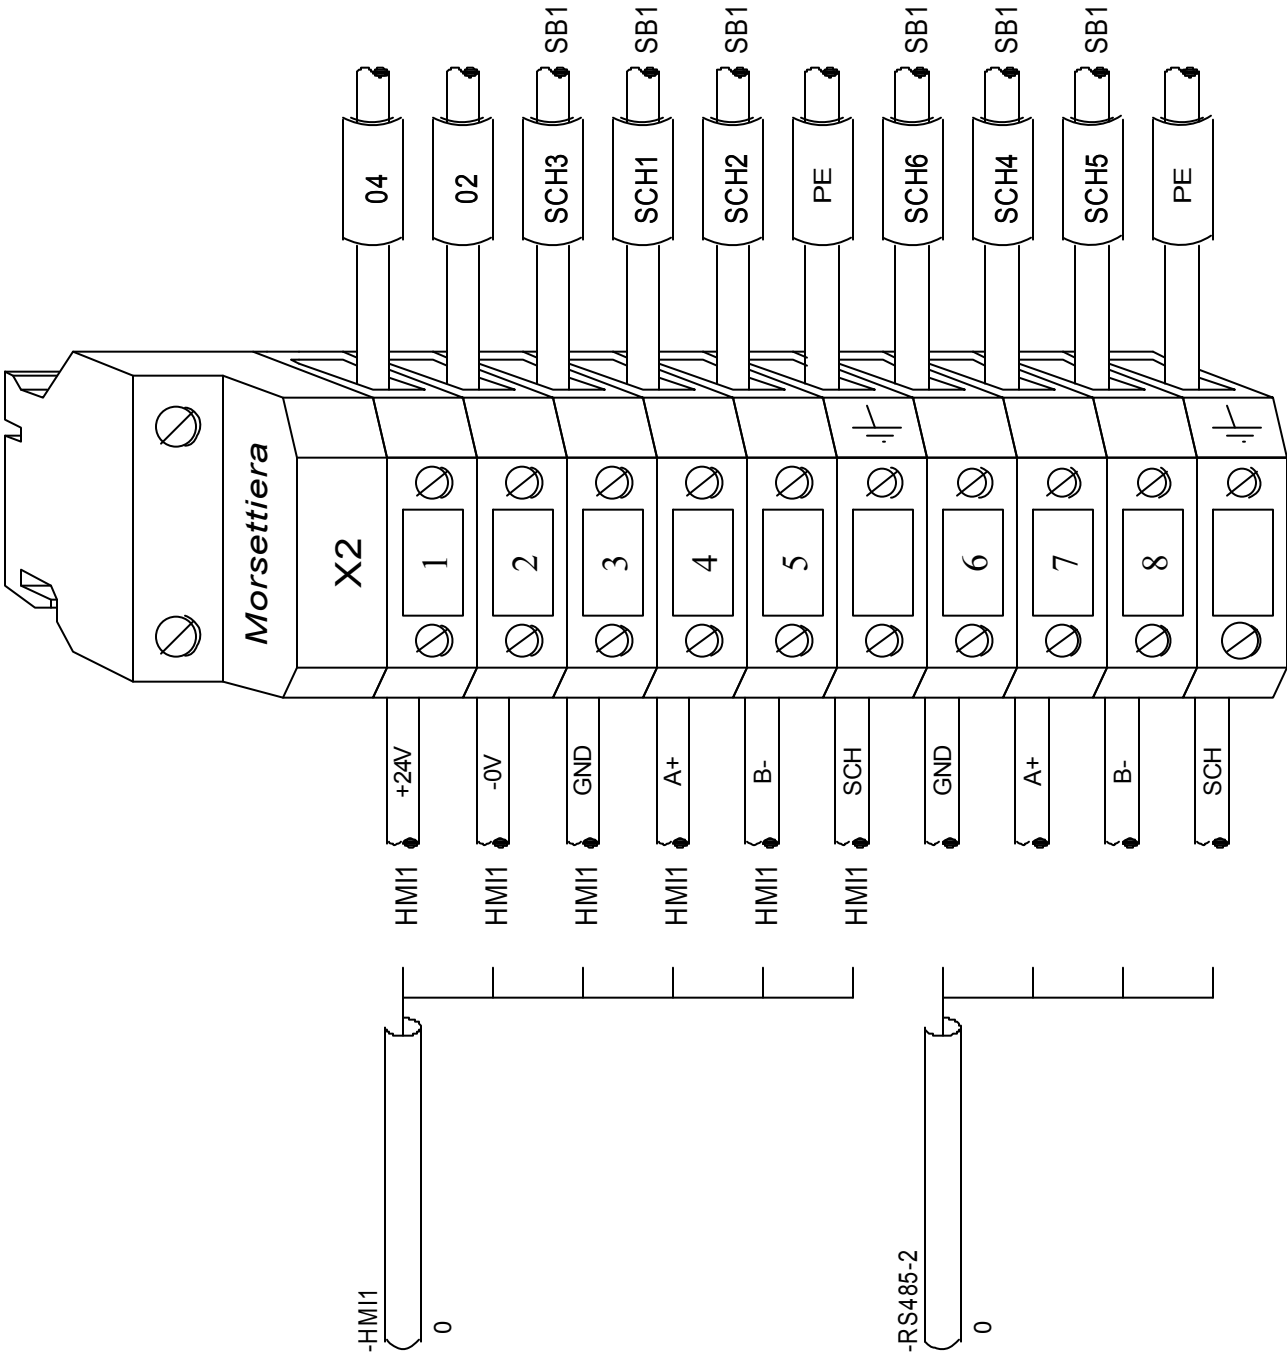

0		1		2		3		4		5		6		7		8		9			
LISTA MATERIALI																					
Sigla		Descrizione				Codice				Costruttore				Ubicazione				POSITION			
C1		Relay sequenza fasi 3Ph				CMPFE2				AB B				QP				03.4			
F1		E933/32 SEZIONATORE PORTAFUSIBILI 3P				EA 204 6				AB B				QP				03.2			
F2		E931/32 SEZIONATORE PORTAFUSIBILI 1P				EA 201 2				AB B				QP				03.4			
GD 1		ALIM TRIFASE SWITCHING 24V 120W 5A				DRP024V120W3BN				DELTA				QP				03.2			
HMI1		TERMINALE 4" TOUCH-SCREEN				DOP-B03S211				DELTA				PF				10.1			
KA1		8A 2P Relay 24Vdc				CR-P024DC2				AB B				QP				08.8			
KM1		CONTACTOR 3P 9A 24...60VAC/DC				AF09-30-10-11				AB B				QP				08.2			
KM2		CONTACTOR 3P 9A 24...60VAC/DC				AF09-30-10-11				AB B				QP				08.3			
KM3		CONTACTOR 3P 9A 24...60VAC/DC				AF09-30-10-11				AB B				QP				08.5			
KM4		CONTACTOR 3P 26A 24...60VAC/DC				AF26-30-00-11				AB B				QP				08.6			
KM5		CONTACTOR 3P 26A 24...60VAC/DC				AF26-30-00-11				AB B				QP				08.7			
KM6		CONTACTOR 3P 26A 24...60VAC/DC				AF26-30-00-11				AB B				QP				08.8			
KR11		Cont.stat.50A 1P 230/460V 4-30VDC				RC11DD4050				DELTA				QP				07.6			
KR12		Cont.stat.50A 1P 230/460V 4-30VDC				RC11DD4050				DELTA				QP				07.8			
KV1		VFD 2,2KW 400V TRI				VFD022EL43A				DELTA				QP				04.4			
KV2		VFD 1,5KW 400V TRI				VFD015EL43A				DELTA				QP				05.4			
KVA1		8A 2P Relay 24Vdc				CR-P024DC2				AB B				QP				08.2			
KVA2		8A 2P Relay 24Vdc				CR-P024DC2				AB B				QP				08.4			
L1		MLBL-01BW LOCK LED INTEG. DIN 24VAC/DC				KV 541 4				AB B				PF				08.1			
L2		MLBL-01BR LOCK LED INTEG. DIN 24VAC/DC				KV 537 2				AB B				PF				14.1			
MP 1		CORPO PLAS 1NO1NC				ZCP21				SCHNEIDER ELECTRIC								11.1			
MP 1		HEAD PULS METAL				ZCE10				SCHNEIDER ELECTRIC								11.1			
QM1		INTERR. SALVAMOTORE 4-6,3 A				MS116-6,3				AB B				QP				04.1			
QM1		CONTATTI AUX. 1NO+1NC FRONTALE				HKF1-11				AB B				QP				04.1			
QM1 (OPT1)		INTERR. SALVAMOTORE 6,3-10 A				MS116-10				AB B				QP				04.4			
QM2		INTERR. SALVAMOTORE 2,5-4 A				MS116-4				AB B				QP				05.1			
QM2		CONTATTI AUX. 1NO+1NC FRONTALE				HKF1-11				AB B				QP				05.1			
QM2 (OPT2)		INTERR. SALVAMOTORE 6,3-10 A				MS116-10				AB B				QP				05.4			
QM3		INTERR. SALVAMOTORE 0,4-0,63 A				MS116-0,63				AB B				QP				06.1			
QM3		CONTATTI AUX. 1NO+1NC FRONTALE				HKF1-11				AB B				QP				06.1			
QM4		INTERR. SALVAMOTORE 25-32 A				MS132-32				AB B				QP				07.1			
QM4		CONTATTI AUX. 2NO FRONTALE				HKF1-20				AB B				QP				07.1			
QM5		INTERR. SALVAMOTORE 25-32 A				MS132-32				AB B				QP				07.3			
QM5		CONTATTI AUX. 2NO FRONTALE				HKF1-20				AB B				QP				07.3			
QM6		INTERR. SALVAMOTORE 25-32 A				MS132-32				AB B				QP				07.5			
QM6		CONTATTI AUX. 2NO FRONTALE				HKF1-20				AB B				QP				07.5			
QS1		SEZIONATORE 3X100A DA PANEL				OT100FT3				AB B				PF				03.0			
SB1		UNITA' BASE 24AC,12 ID, 12 IA, 12 DO, 6				AVC1260060500				ELIWELL				QP				08.1			
						TFT DRY AIR SOLUTIONS Via J.F.Kennedy, 25/27/29 - 56020 Capanne Z.I.Fontanelle								PROJECT: AD5000E (React.Elect.)						SHEET 18	
														CUSTOMER: -							
														COMMITTED:-							
														TITLE: Lista materiali - MULTILINGUA						17◀▶	
1	12/04/2019			Modifica bobina di sgancio resistenze																	
REV.	DATE	SIGNAT.	CHANGE											DRA.: 01		DATE: 12/11/2018		LOC.:			